


MPRO /Wisp Thermo Set with Integrated Handshower

US-PRO1701RSET/US-PRO1701175RSET
US-WP1701RSET/US-WP1701175RSET

Installation Instructions

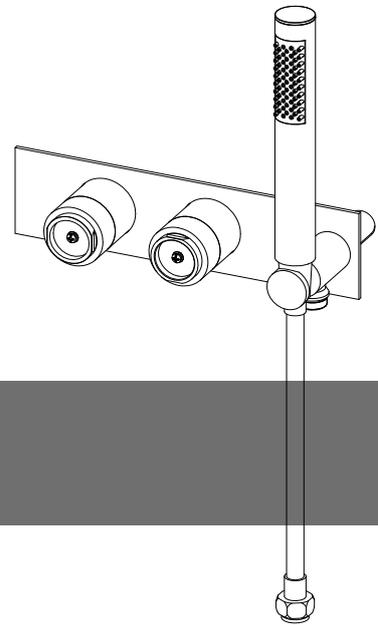

Introduction

The faucets in this range are single flow (hot and cold water mix in the body) and should therefore be supplied with hot and cold water at balanced pressures. If the faucets are not supplied at balanced pressures then the mixer will not function correctly.

The faucets are fitted with quarter-turn ceramic disc cartridges which provide a good flow rate with very smooth movement.

For use with shower heads rated at 6 L/min (1.6 gpm) or higher

IMPORTANT: Please read these instructions carefully before you begin and retain for future reference. These instructions have been prepared for your guidance, you must exercise due care at all times.

Before beginning installation, check for any damage that may have occurred during transport. **Note: Damage claims cannot be made during or after installation.**

We do not accept responsibility for any problems that may occur through incorrect installation.

Installation notes


The installation must comply with all plumbing codes including local codes and be installed by a licensed plumbing contractor.

WARNING! Before installing a new faucet it is essential that the supply pipes are thoroughly flushed in order to remove any remaining debris, solder or other impurities. Failure to carry out this simple procedure can cause problems or damage to the working of the faucet. Installing shut-off valves on incoming supply lines is recommended for ease of maintenance.

Turn off the main water supply before connecting to any existing pipework or doing any maintenance.


WARNING! Please check for any hidden pipes and cables, electric or otherwise, before drilling holes in a wall or floor.

Dimensions

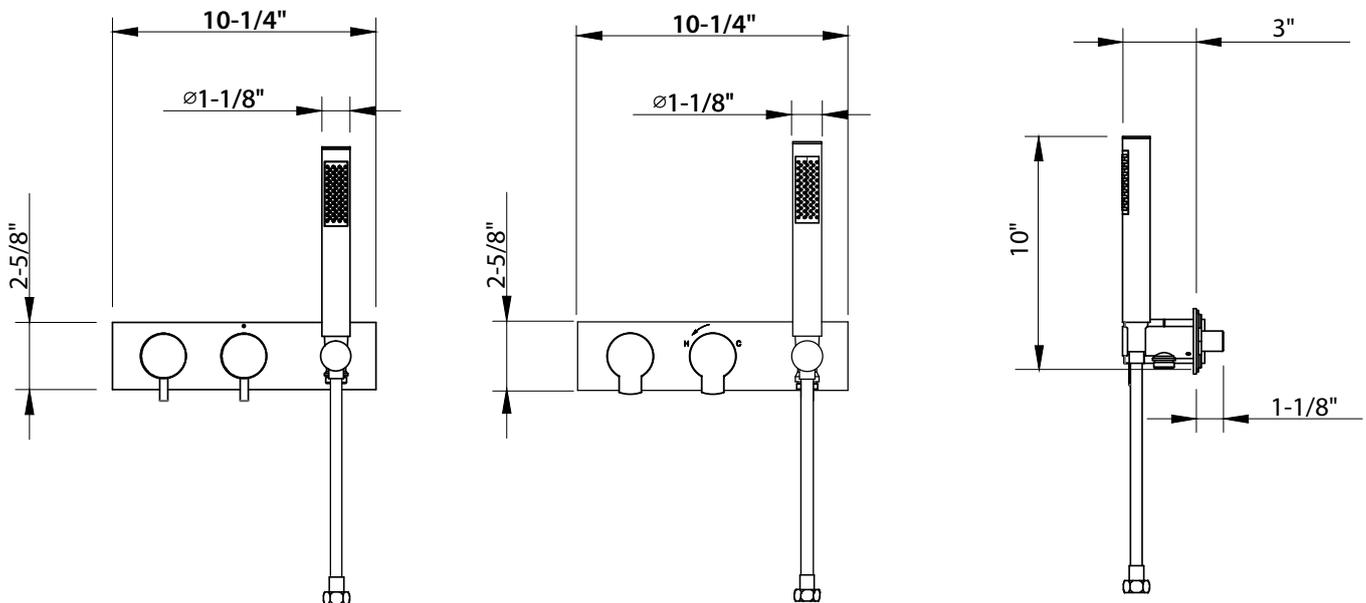

1 Installation

- Position the valve on to the wall and mark the position of the fixing lugs (x4).
- Make sure the valve is set back from the front face of the wall by the appropriate depth to allow for plasterboard, filling and tiling (min. 3" to max. 4").
- Mount casting to the wall using suitable fixings.
- Leave access to the four front cartridges for servicing.
- Once the valve has been secured to the wall, the black plastic dust cover can be temporarily attached to the valve with the screws supplied. This will protect the valve while the rest of the work is completed.
- First make connection main outlet (bath or fixed head) from the outlet on the underside of the valve.
- Connect the 90-degree elbow provided to the secondary outlet of the valve pointing it to the right. Then fix the straight end of the flexi hose on to this elbow.
- The other end of the flexi hose is then connected to the male threaded stud on the wall side of the cover plate.
- **Note: Copper pipe can be used in lieu of the flexi hose.**
- **WARNING! Do not use tapered threaded adapters or excessive thickness of sealing tape as this may damage the valve body and result in a concealed leak within the wall cavity.**
- Remove the plastic dust cover.
- Turn on supplies and test all connections for leaks.
- Remove the hot and cold check valves, flush out the installation, clean the filters and re-install.
- Apply a narrow bead of clear silicone sealant around the back edges of the cover plate and carefully place into position.
- Install the control handles by lining up the flat surface of the valve cover with the set screw on the handle.
- Tighten the screw with the hexagonal key.

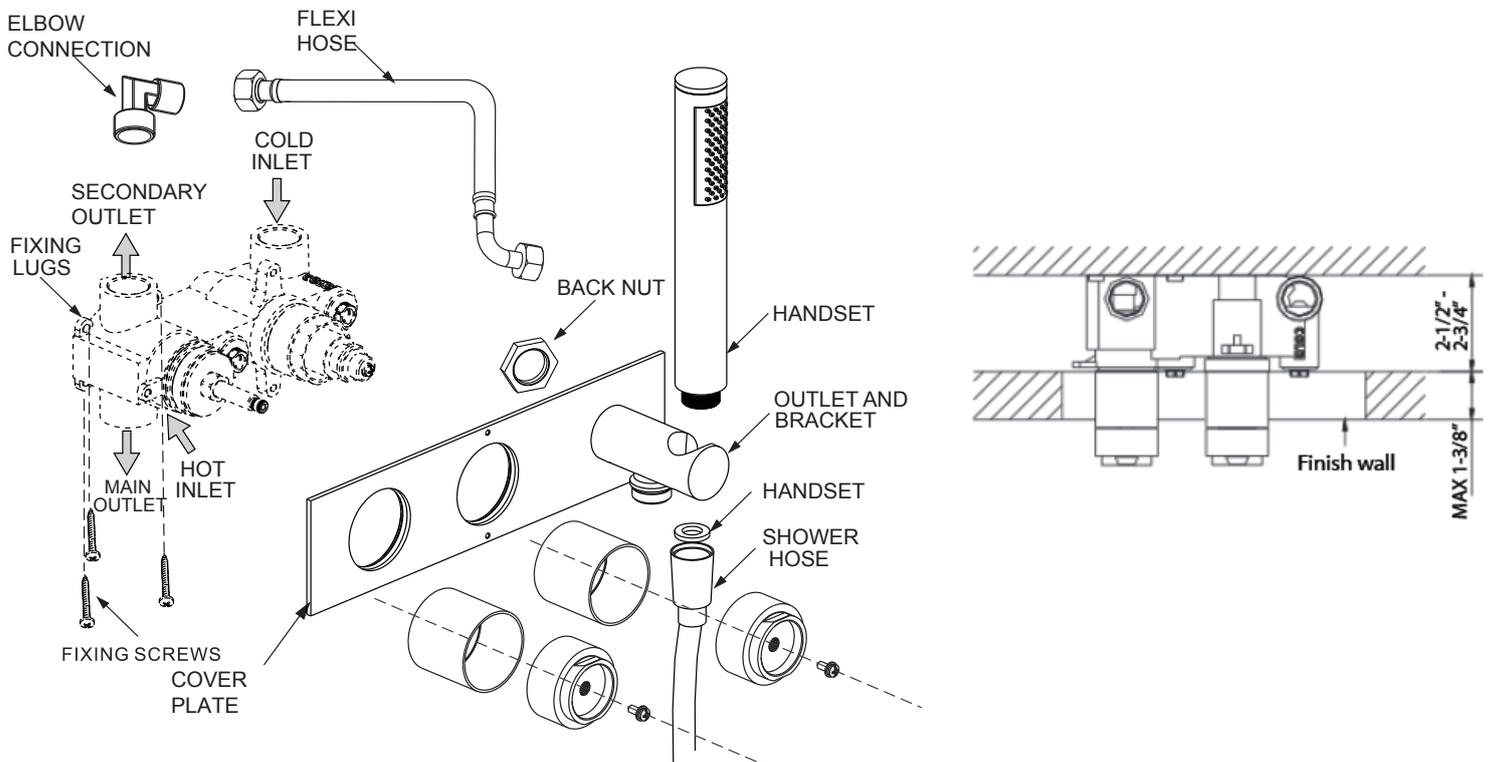

Cleaning Instructions

Rinse away any traces of soap and gently dry with a clean, soft cloth after each use. Rinse completely with water and dry any overspray. This will maintain the finish and avoid water spotting.

To remove mineral deposits, use a 50/50 solution of white vinegar and water. Do not allow the solution to soak on the product. Simichrome Polish® contains a protective film to enhance maintenance and is helpful in preventing water spot buildup. Follow instructions to ensure optimum results.

Never use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners, cleansers or disinfectants will alter the surface finish and void the warranty.

Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain and glass cleaners to remain on the surface. Prolonged contact will alter surface finishes and void the warranty.

We DO NOT recommend using any household cleaners as many can cause damage to the finish.

Please see the website for care instructions for specific finishes.

Warranty - This **Crosswater London** product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website.

For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757 Toll

www.crosswaterlondon.com

free number: 844-XWATER-1 (844-992-8371)

tel: 508-381-0433

fax: 508-381-6068

email: technical@crosswaterlondon.com