


Waldorf 31" Basin Console Set
US-WF80X81 / US-WF0813

Waldorf 39" Basin Console Set
US-WF100X81 / US-WF1003

Waldorf 59" Basin Console Set
US-WF150X81 / US-WF1503

Installation Instructions

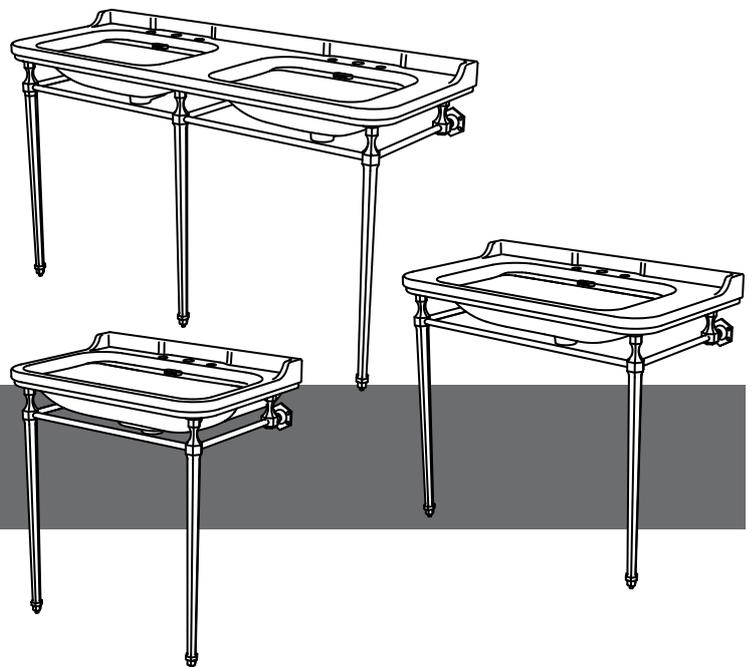

Introduction

All parts have been fully inspected throughout the production process and only leave our factory after a 15-step QC process.

Carefully remove the items from the box and check that all parts have been supplied. Before beginning installation, please check for any damage that may have occurred during transport. **Note: Damage claims cannot be made during or after installation.**

Installation should be completed by at least two suitably competent installers.

Improper installation shall result in loss of warranty in case of damage.

Wall fixings are not supplied. Source fixings which are suitable to the site wall.

IMPORTANT: Please read these instructions carefully before beginning and retain for future reference.

We do not accept responsibility for any problems that may occur through incorrect installation.

Installation notes

The installation must comply with all plumbing codes including local codes and be installed by a licensed plumbing contractor.

Store the products in a safe place until you begin installation to avoid any damage.

Assemble the parts on a mat to protect against scratching the surface.


Avoid getting cement, grit, sand or masonry products on to the surface.

Protect and cover the products during the installation period to prevent damage from occurring.


IMPORTANT: Turn off the main water supply before connecting to any existing pipework or doing any maintenance.

WARNING! Please check for any hidden pipes and cables, electric or otherwise, before drilling holes in a wall or floor.

Parts supplied - Console frame

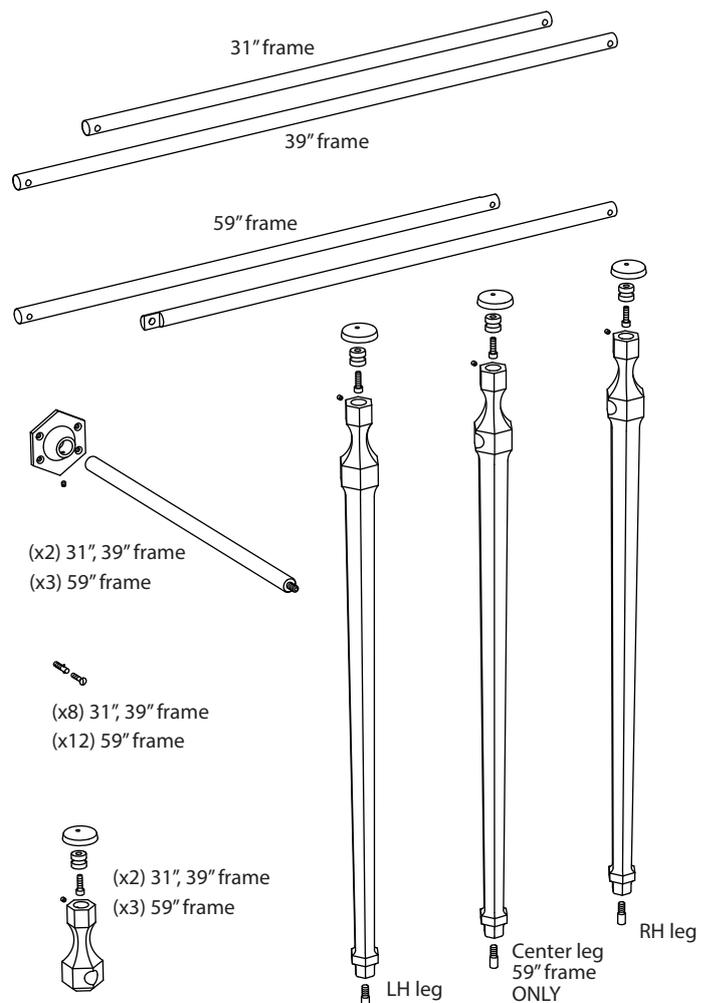


Tools required

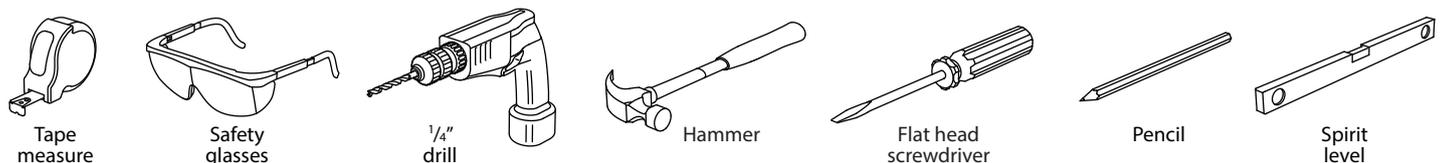


Dimensions


31" Basin

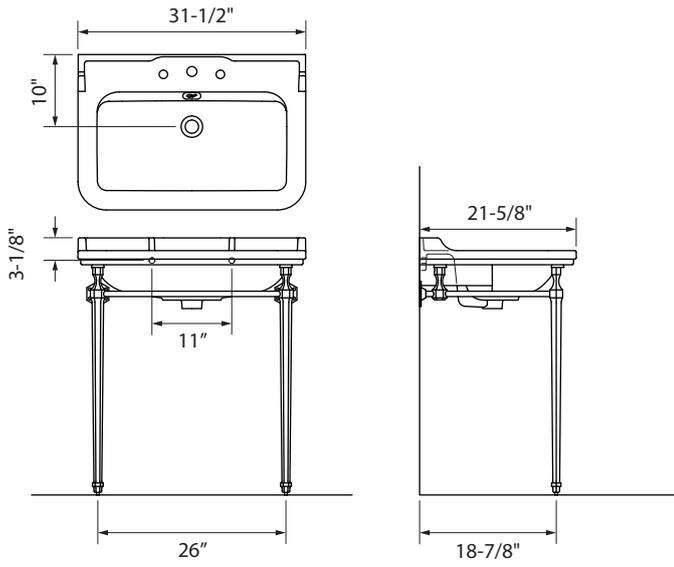

39" Basin

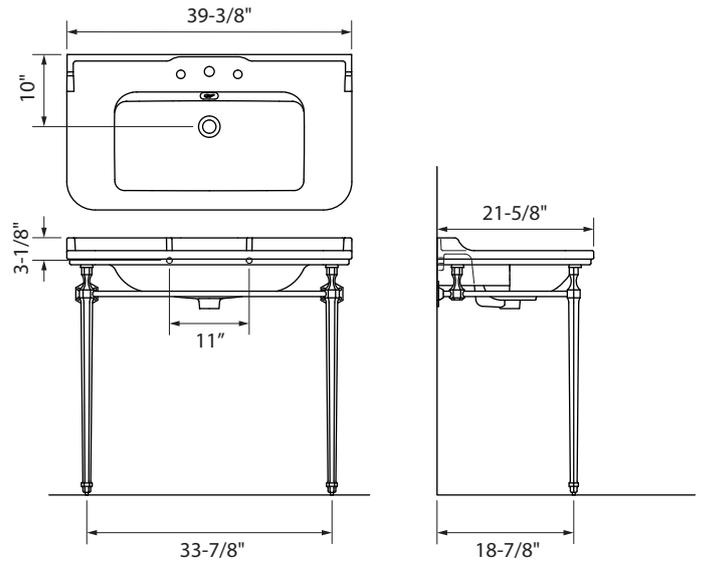


59" Basin

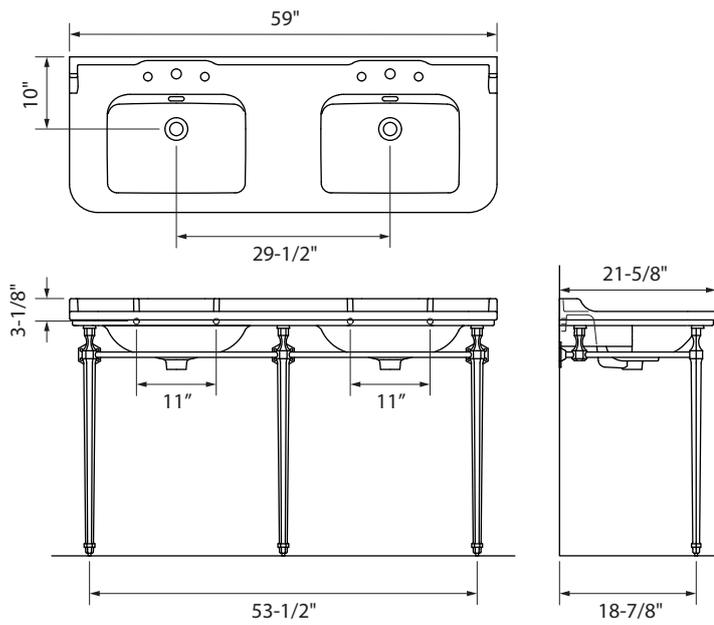


1 Installation - Console frame

Please make sure you have the correct basin suitable for the basin frame.


- 2** Center leg, 59" Frame ONLY.
Fit both front rails to the center leg, screw side rail into front rails through rear of center leg ensuring threaded front rail is facing forwards.

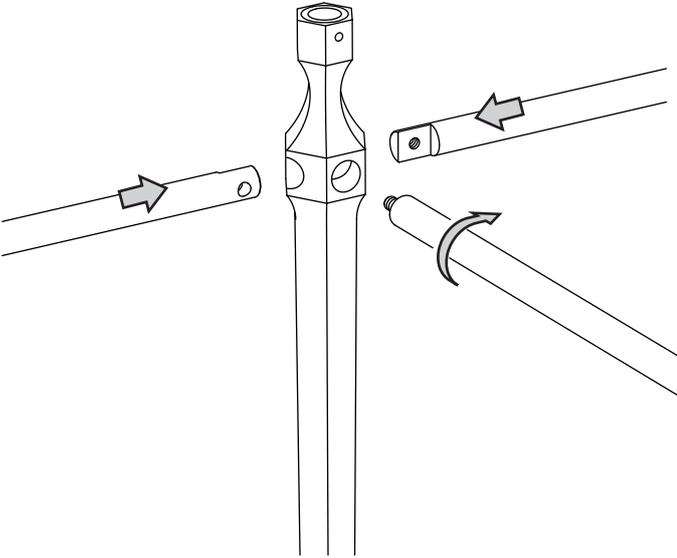


- 3** Right hand leg.
Fit front rail to side of right hand leg, screw side rail into front rail through rear of right hand leg.

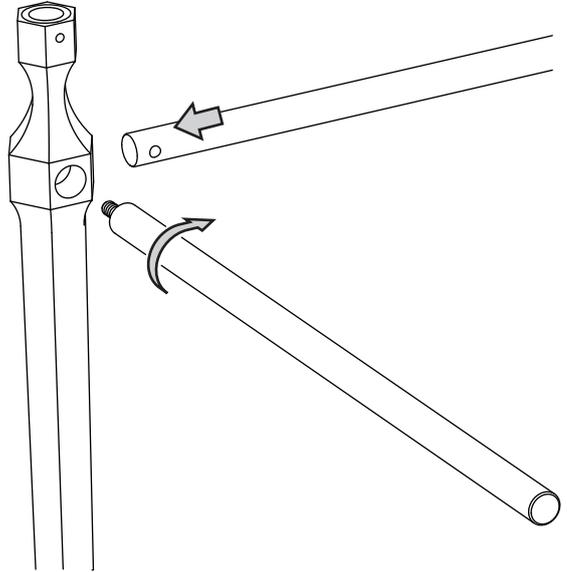


- 4** Left hand leg.
Fit front rail to side of left hand leg, screw side rail into front rail through rear of left hand leg.

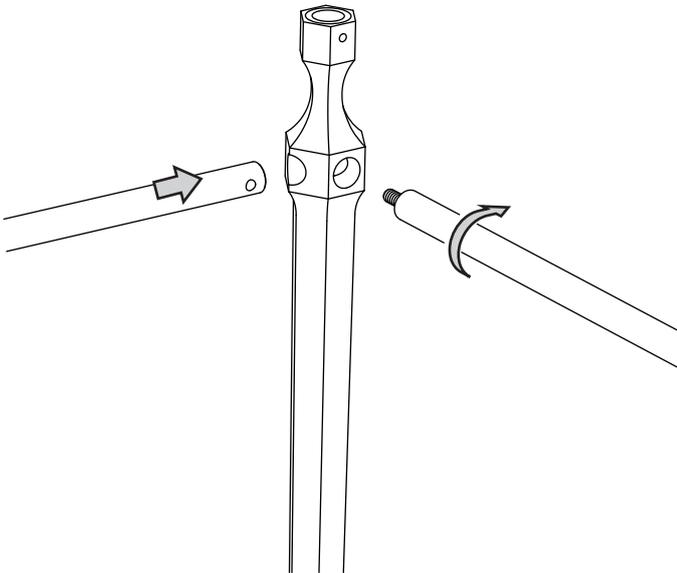


- 5** Fit rear supports to side rails ensuring vertical alignment, secure with screws.
Fit wall brackets to side rails and secure with screws.

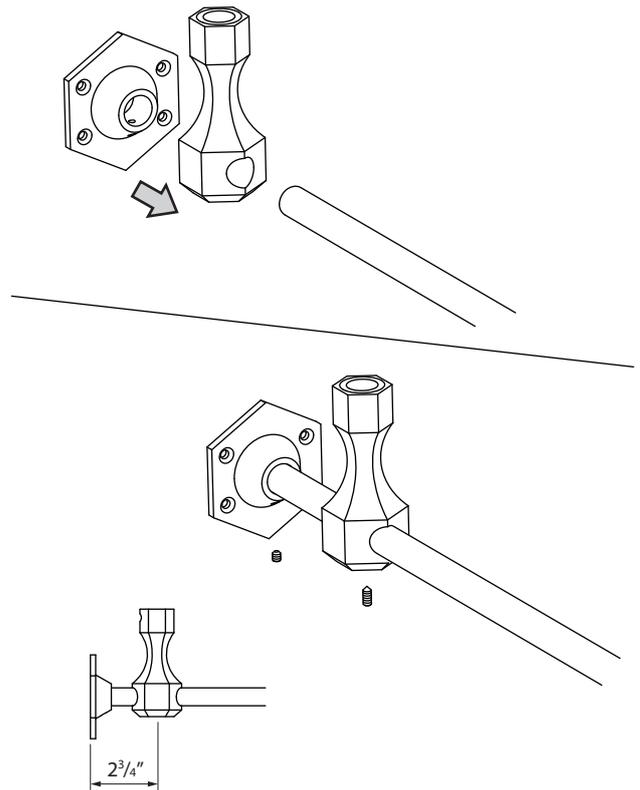


6 Determine the final installation position and mark the wall fixing hole positions in pencil. Please make sure the frame is level, if required adjust the leg pins.

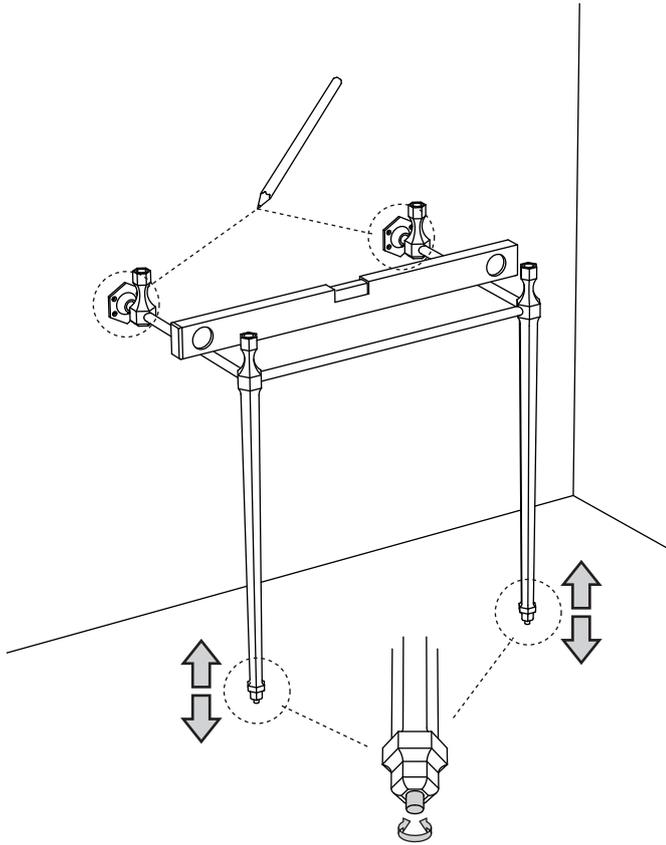


7 Using a 1/4" drill bit drill the required holes on the marked positions.

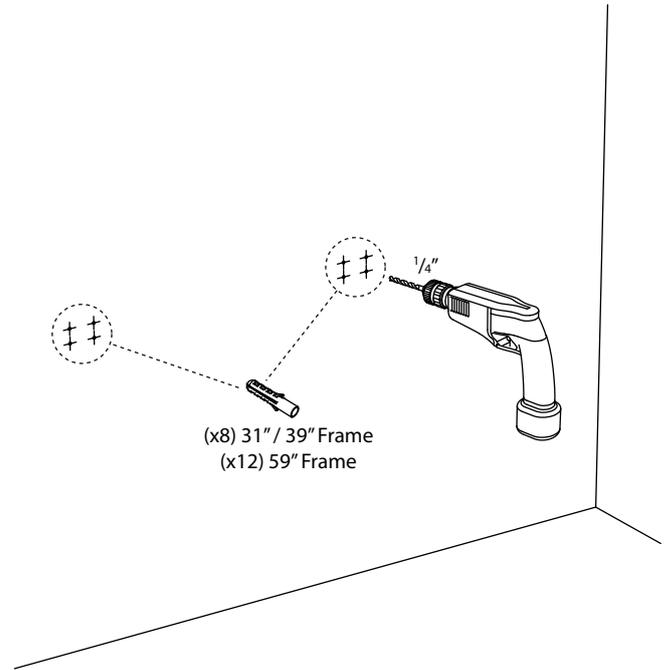


8 Fix the brackets onto the wall. Fix the support nylons to the adapters using screws. Fit the adapters to the legs and rear supports and secure with screws.

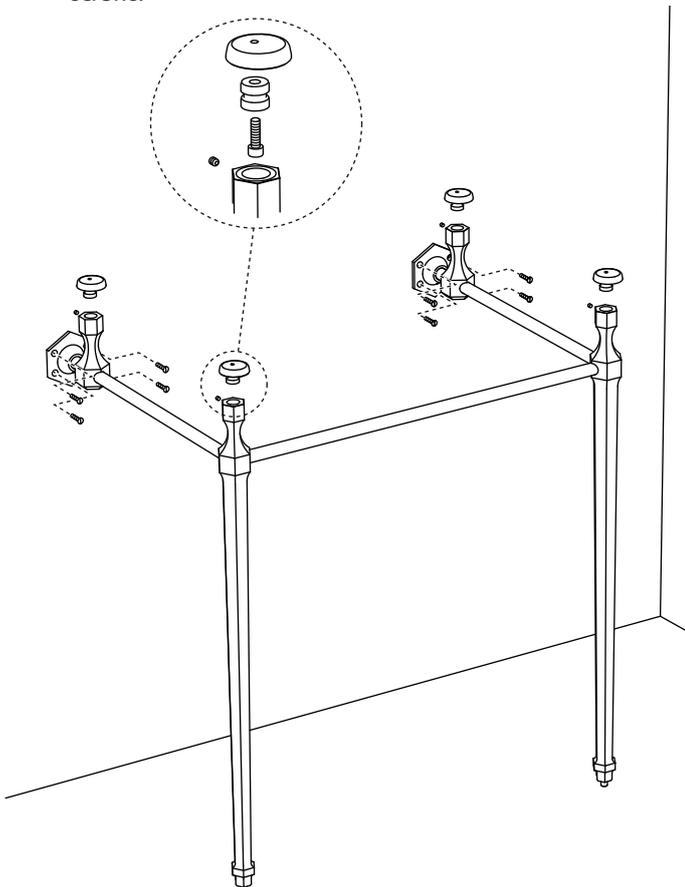


9 Place the basin in position ensuring that it is level. Mark the basin fixing holes on the finished wall.

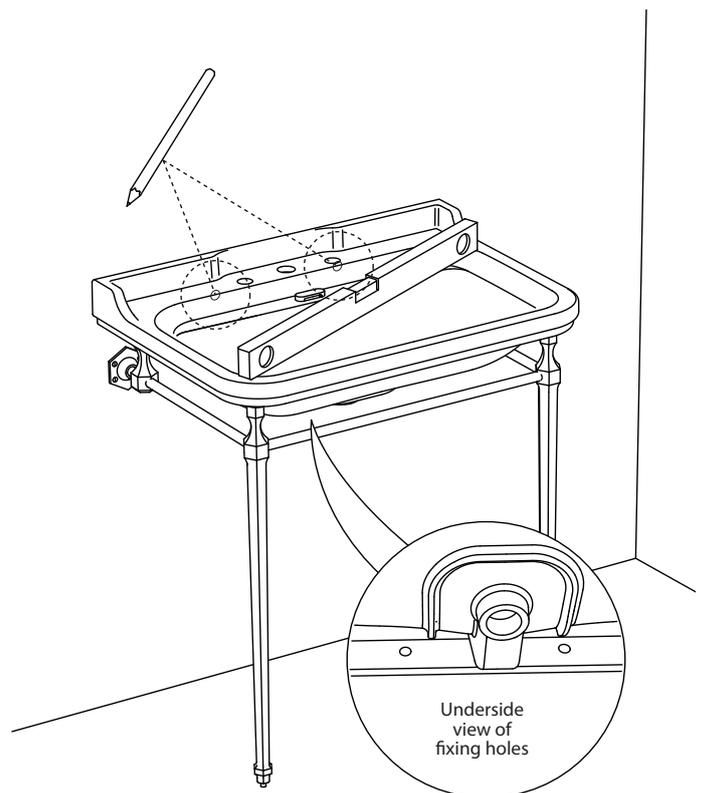


10 Move the basin aside. Drill 1/4" holes at the marked locations.

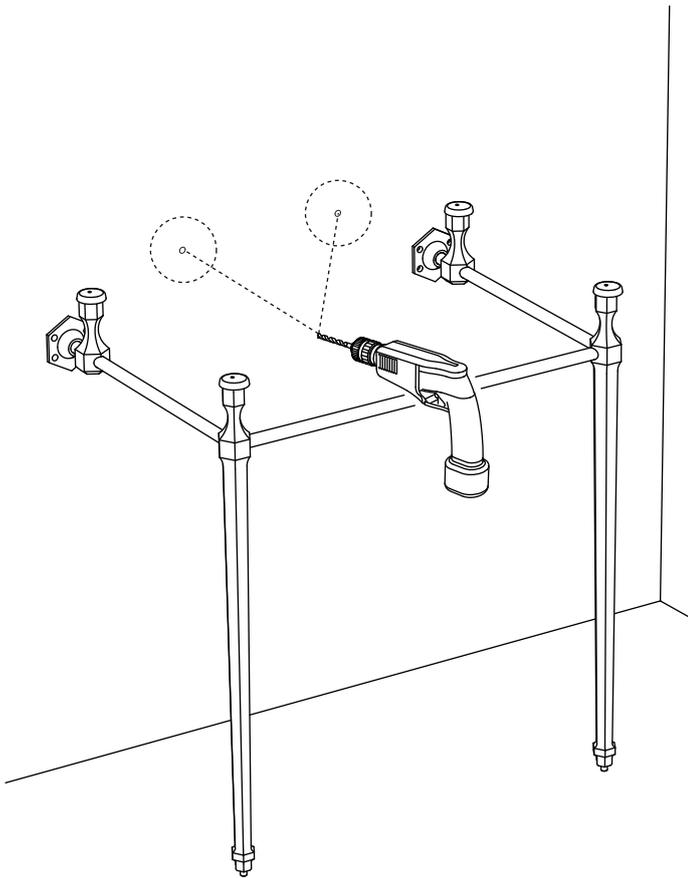


11 Install hanger bolts so they extend 1-1/2" beyond the finished wall.

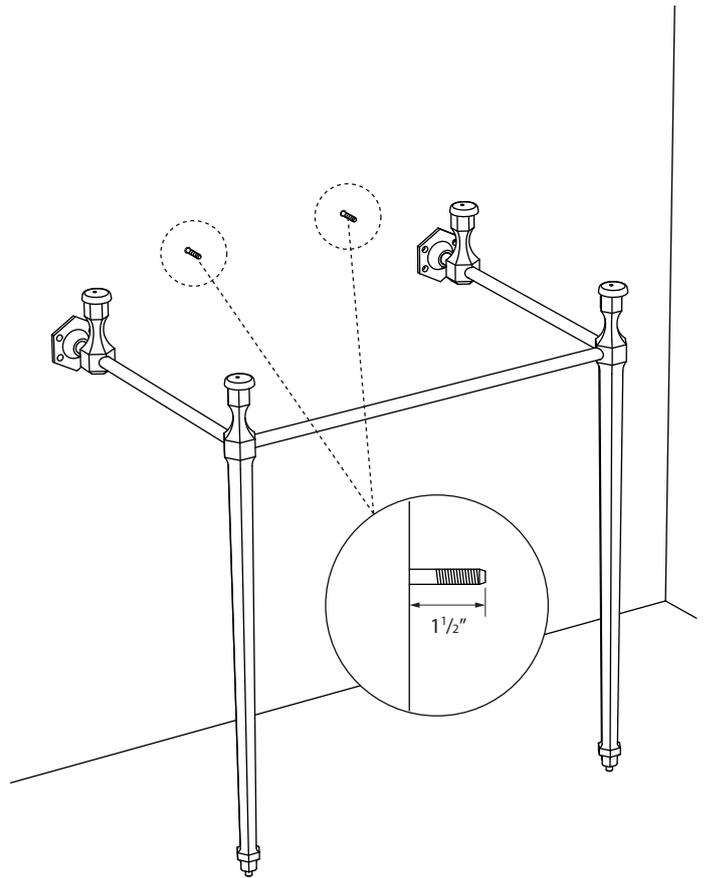


12 Position the basin on the frame so the hanger bolts extend through the fixing holes. Secure the basin using cap nuts and washers, **DO NOT OVERTIGHTEN!**

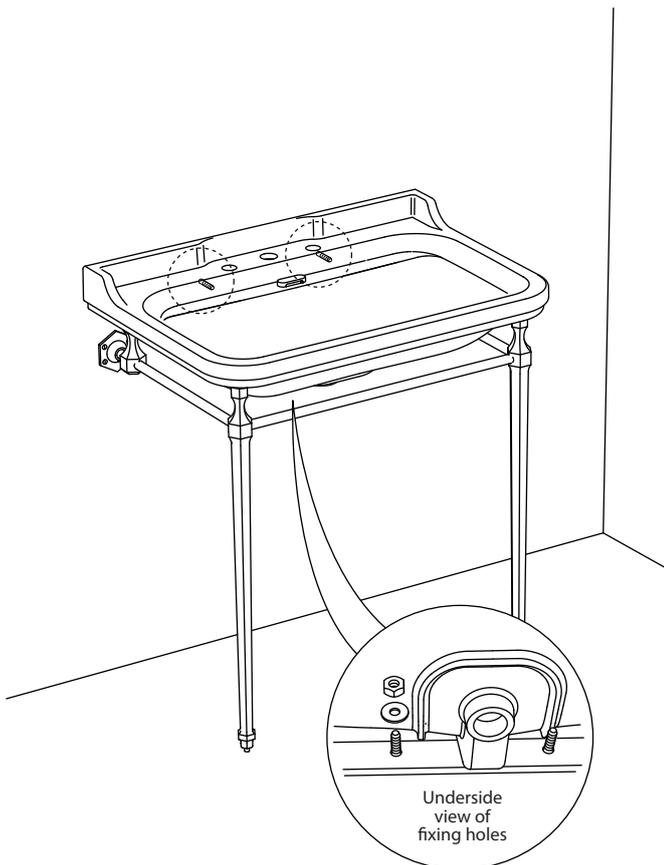

13 Apply sealant.

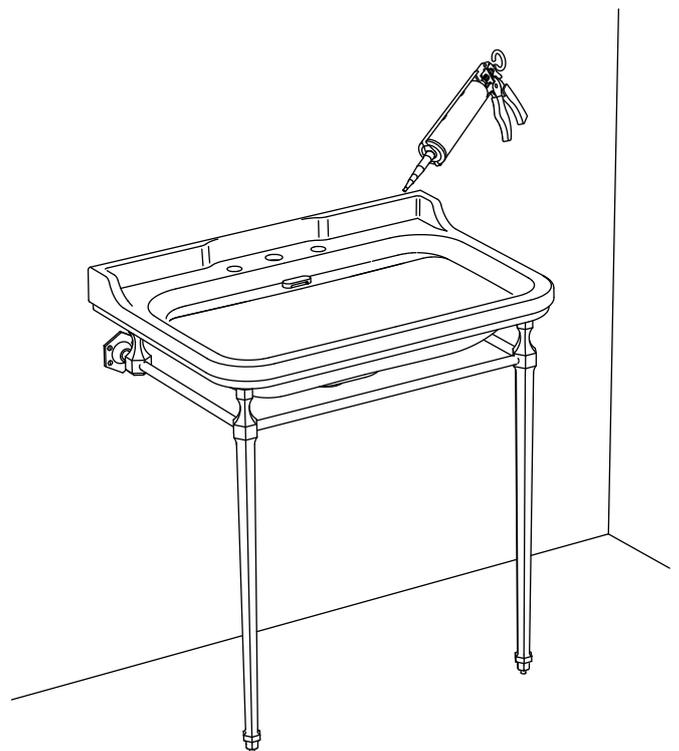


14 Fit overflow cap.

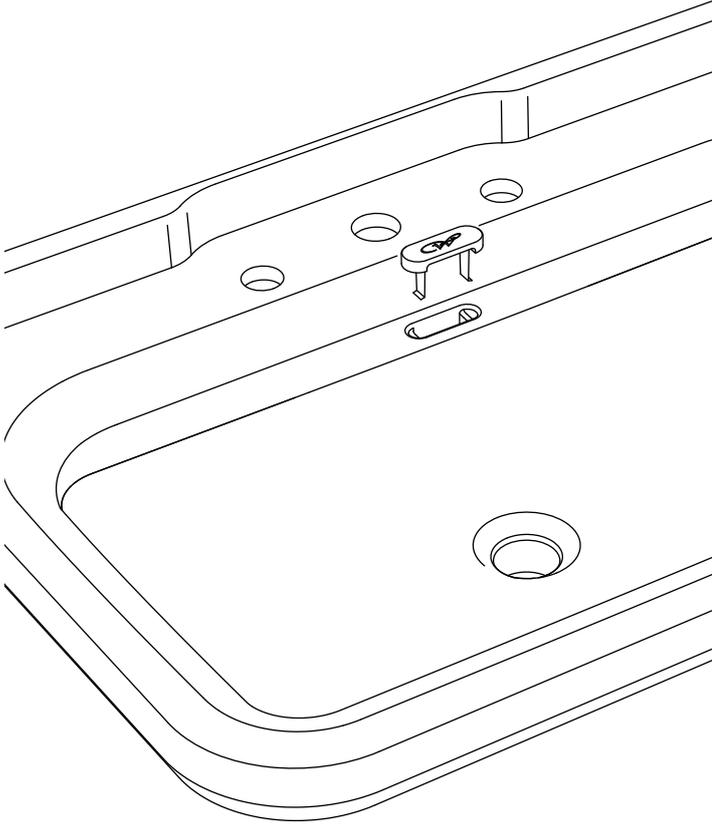


1 Installation - Basin wall


2 Mark the horizontal center line on the wall

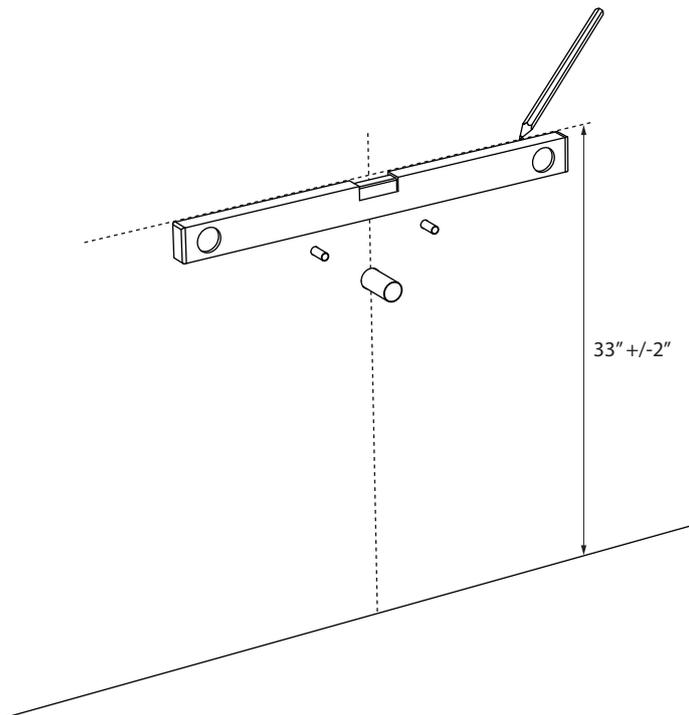


3 31" basin and 39" basin.
Mark the basin fixing holes on the finished wall.

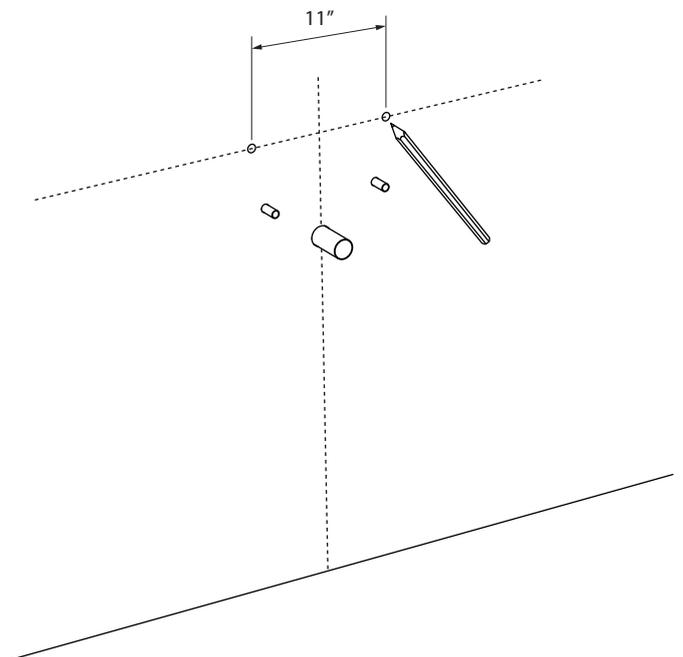


4 59" basin.
Mark the basin fixing holes on the finished wall.

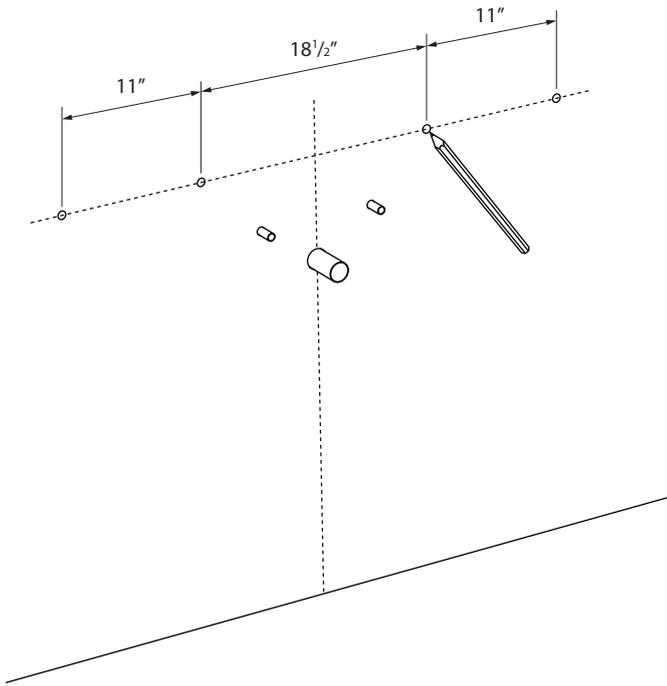


5 Drill 1/4" holes at the marked locations.

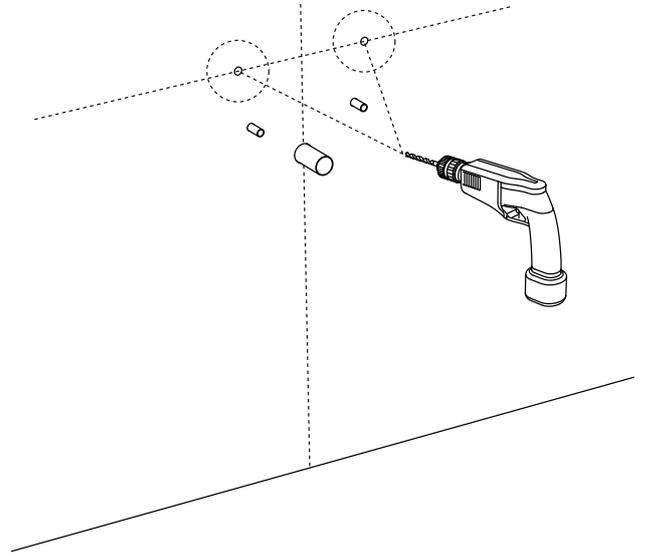


6 Install hanger bolts so they extend 1-1/2" beyond the finished wall.

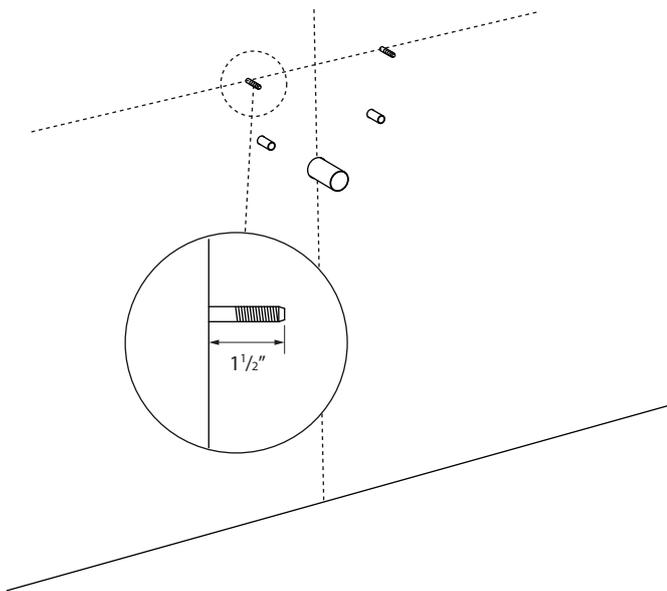


7 Position the basin on the hanger bolts through the fixing holes.
Level and secure the basin using cap nuts and washers.
DO NOT OVERTIGHTEN!

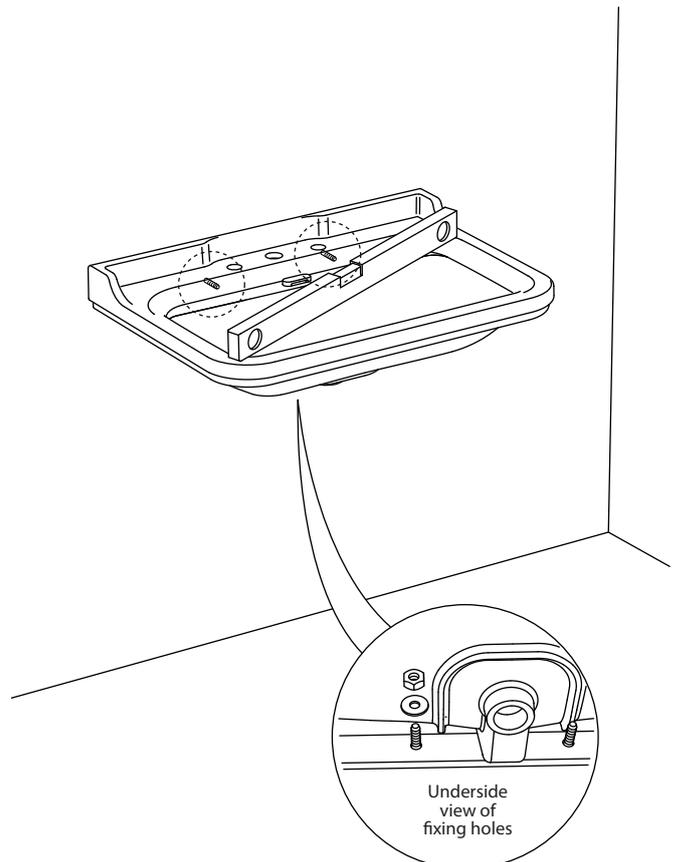

8 Apply sealant

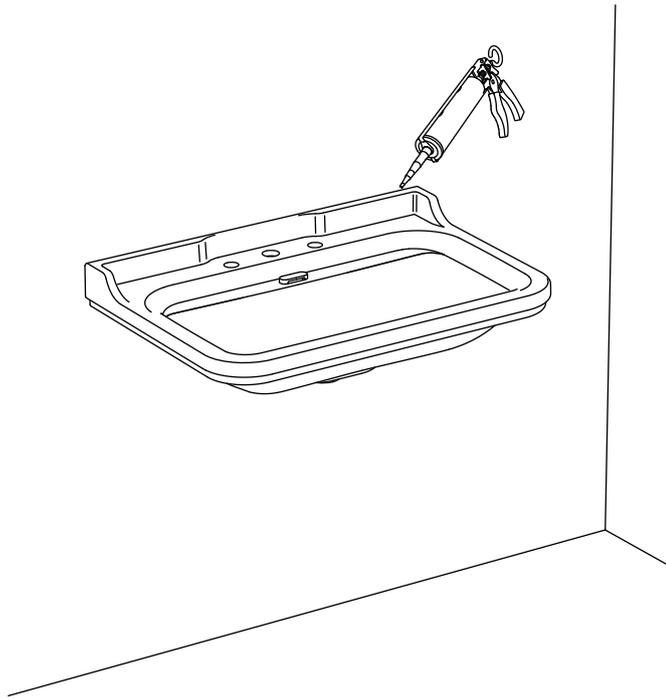

9 Fit overflow cap.

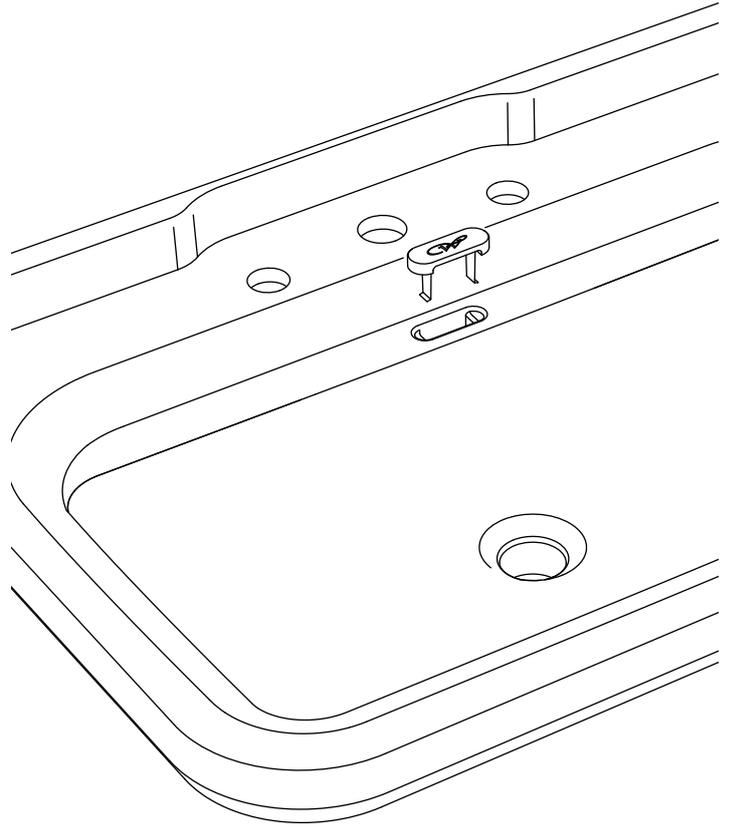

Cleaning Instructions

Frame

Rinse away any traces of soap and gently dry with a clean, soft cloth after each use. Rinse completely with water and dry any overspray. This will maintain the finish and avoid water spotting.

To remove mineral deposits, use a 50/50 solution of white vinegar and water. Do not allow the solution to soak on the product. Simichrome Polish® contains a protective film to enhance maintenance and is helpful in preventing water spot buildup. Follow instructions to ensure optimum results.

Never use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners, cleansers or disinfectants will alter the surface finish and void the warranty.

Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain and glass cleaners to remain on the surface. Prolonged contact will alter surface finishes and void the warranty.

We DO NOT recommend using any household cleaners as many can cause damage to the finish.

Please see the website for care instructions for specific finishes.

Basin

A simple routine of regular care will keep your vitreous china and fireclay products clean and fresh.

Rinse away any traces of soap and gently dry with a clean soft cloth after each use. A mild detergent, warm water and a soft cloth will remove normal dirt and soap accumulations from surfaces.

Soft abrasive cleaners may be used on vitreous china and fireclay. Never use abrasive cleaners without water. Do not use caustic cleaners or disinfectants as they can alter the surface finish and void the warranty.

Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain and glass cleaners to remain on the surface. Prolonged contact can alter surface finishes and void the warranty.

Warranty - This **Crosswater London** product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website.

For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757

www.crosswaterlondon.com

Toll free number: 844-XWATER-1 (844-992-8371) tel: 508-381-0433 fax: 508-381-6068

email: technical@crosswaterlondon.com