


Infinity Water Panels


US-SP380

US-SP500


Installation Instructions

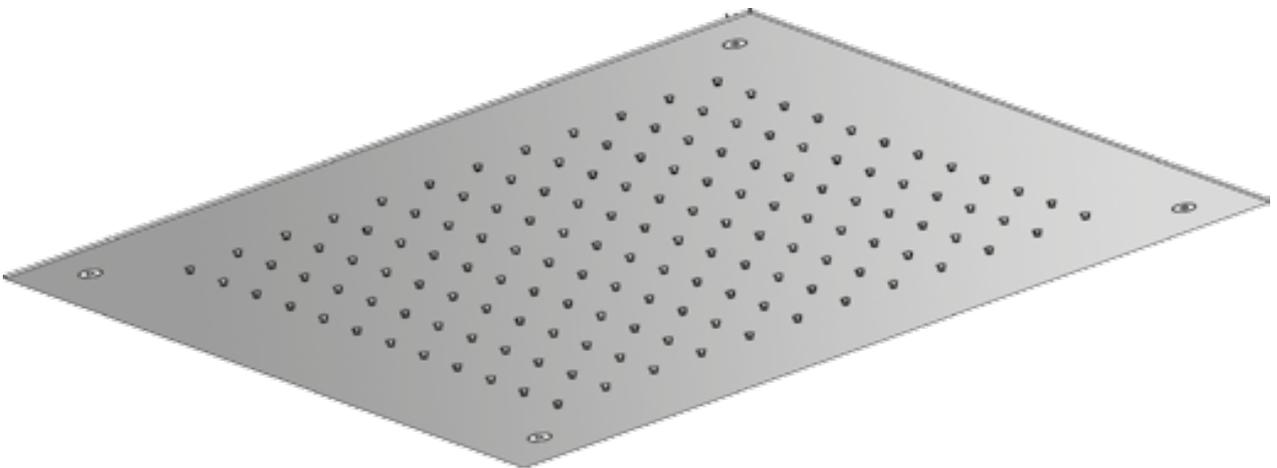


Package Contents

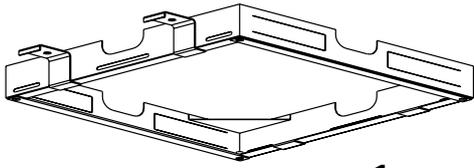

x 1

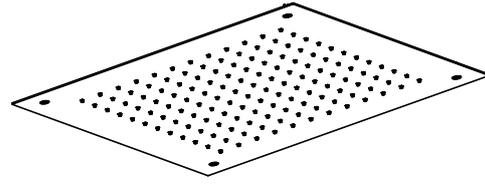


x 1



x 2



x 1



x 4



x 1

Introduction

The water panel has been fully inspected throughout the production process and only leaves our factory after a 15-step QC process.

Carefully remove the water panel from the box and check that all parts have been supplied.

Before beginning installation, check for any damage that may have occurred during transport.

Note: Damage claims cannot be made during or after installation.

Improper installation shall result in loss of warranty in case of damage caused by impacts or rubbing against rough surfaces.

IMPORTANT: Please read these instructions carefully before beginning and retain for future reference. We do not accept responsibility for any problems that may occur through incorrect installation.

Installation notes

The installation must comply with all plumbing codes including local codes and be installed by a licensed plumbing contractor. It is recommended that two people carry out the installation.


IMPORTANT! Before installing a new water panel it is essential that the supply lines are thoroughly flushed in order to remove any remaining debris, solder or other impurities. Failure to carry out this simple procedure can cause problems or damage to the function of the water panel.

Installing shut-off valves on incoming supply lines is recommended for ease of maintenance.

Turn off the main water supply before connecting to any existing pipe work or doing any maintenance.

WARNING! Please check for any hidden pipes and cables, electric or otherwise, before drilling holes in a wall, ceiling or floor.


US-SP380

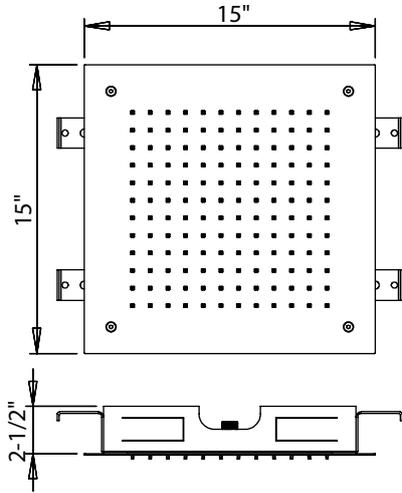

	MIN	14.5 psi
	MAX	72.5 psi
	BEST	43.5 psi
<hr/>		
	MAX	158° F / 70° C
	BEST	100°/104° F
		38°/40° C






Dynamic pressure (PSI) / Flow (GPM)										
PSI	7.3	14.5	21.8	29.0	36.3	43.5	50.8	58.0	65.3	72.5
GPM	1.17	1.60	1.90	2.09	2.25	2.32	2.24	2.25	2.24	2.22

US-SP500

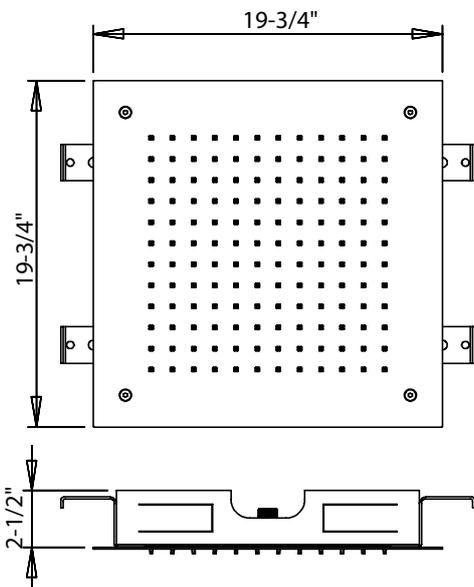


	MIN	14.5 psi
	MAX	72.5 psi
	BEST	43.5 psi
<hr/>		
	MAX	158° F / 70° C
	BEST	100°/104° F
		38°/40° C


Dynamic pressure (PSI) / Flow (GPM)										
PSI	7.3	14.5	21.8	29.0	36.3	43.5	50.8	58.0	65.3	72.5
GPM	1.63	2.10	2.25	2.29	2.34	2.36	2.33	2.29	2.29	2.31

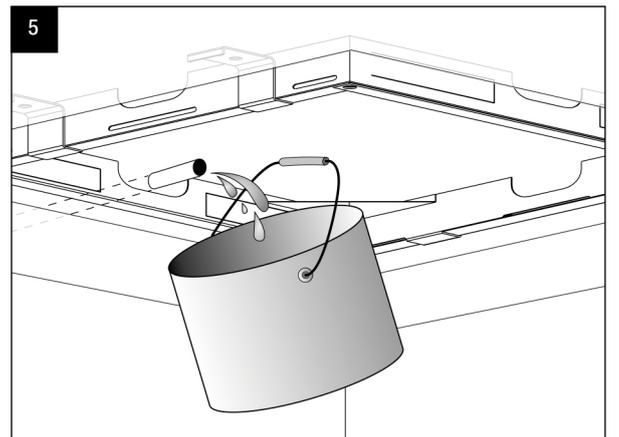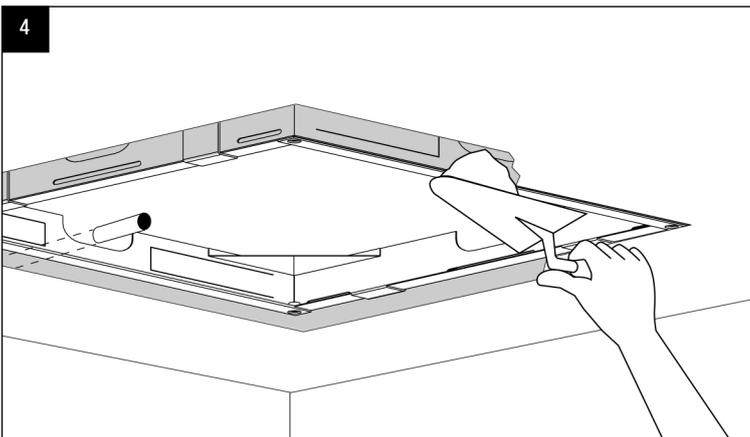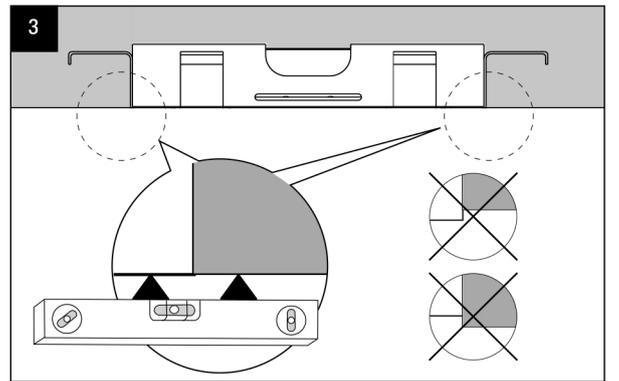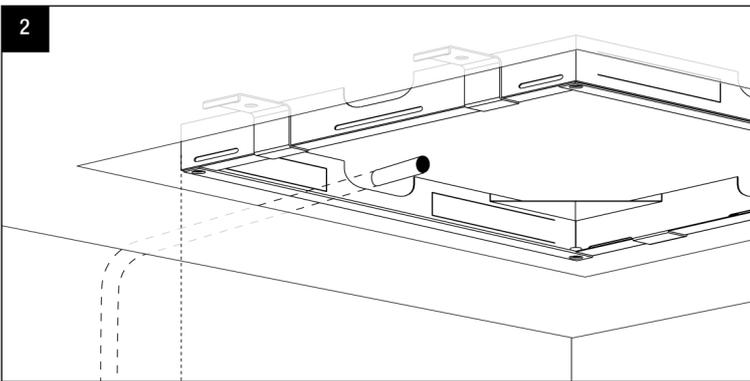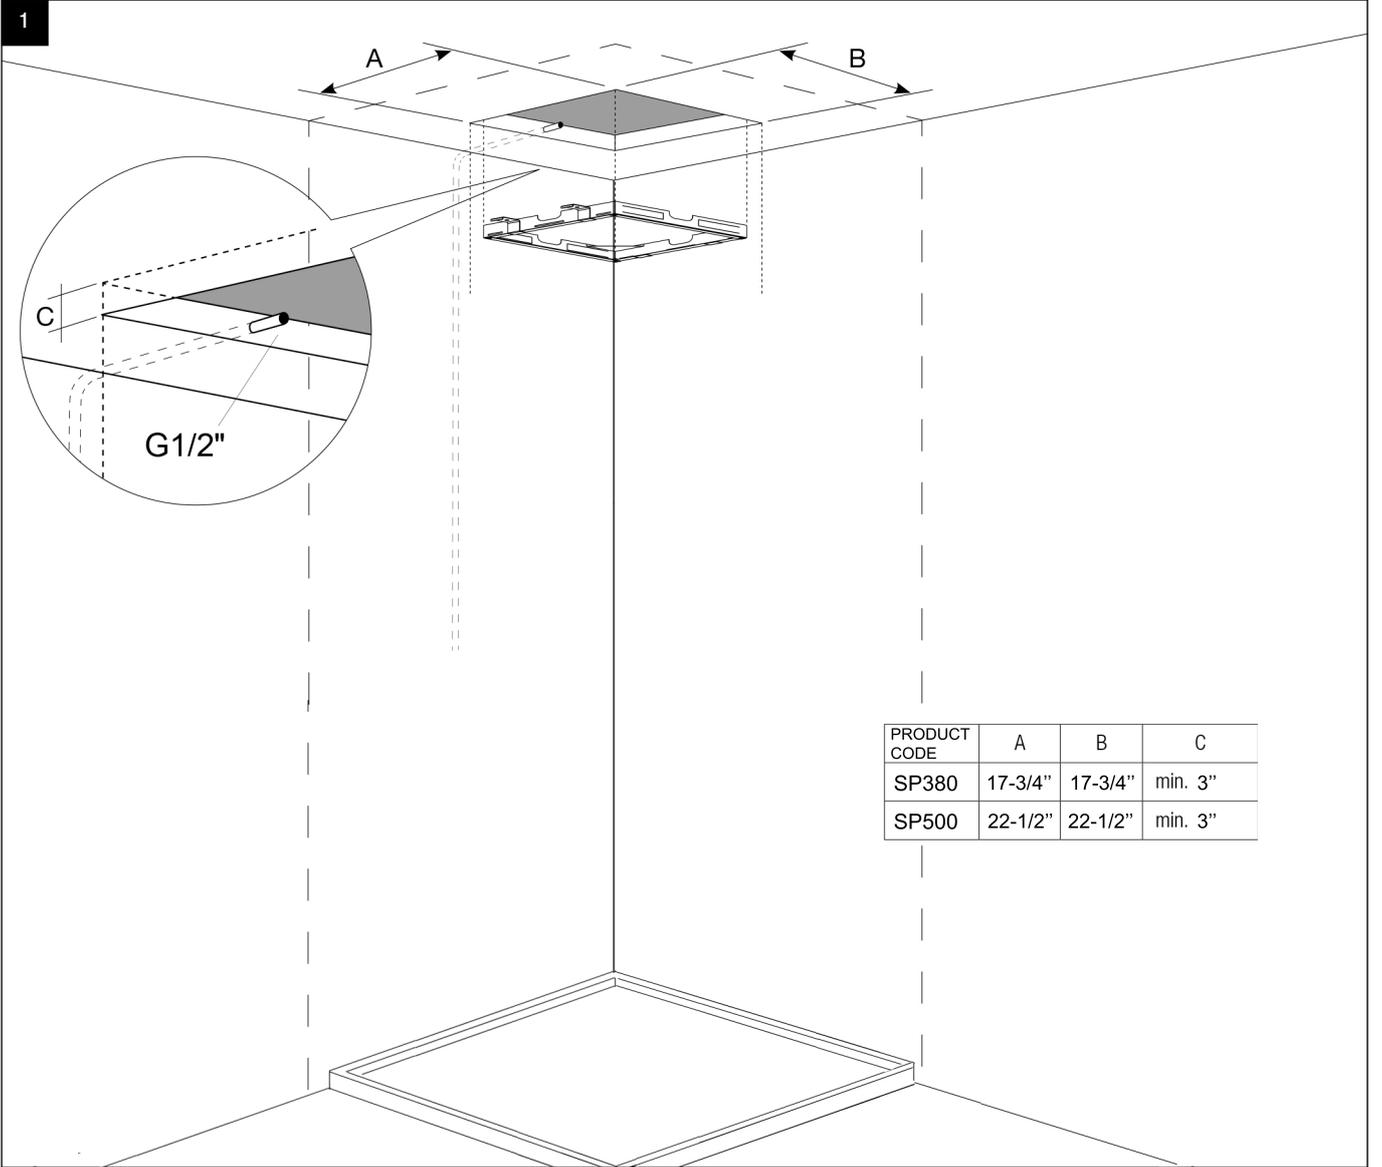


6


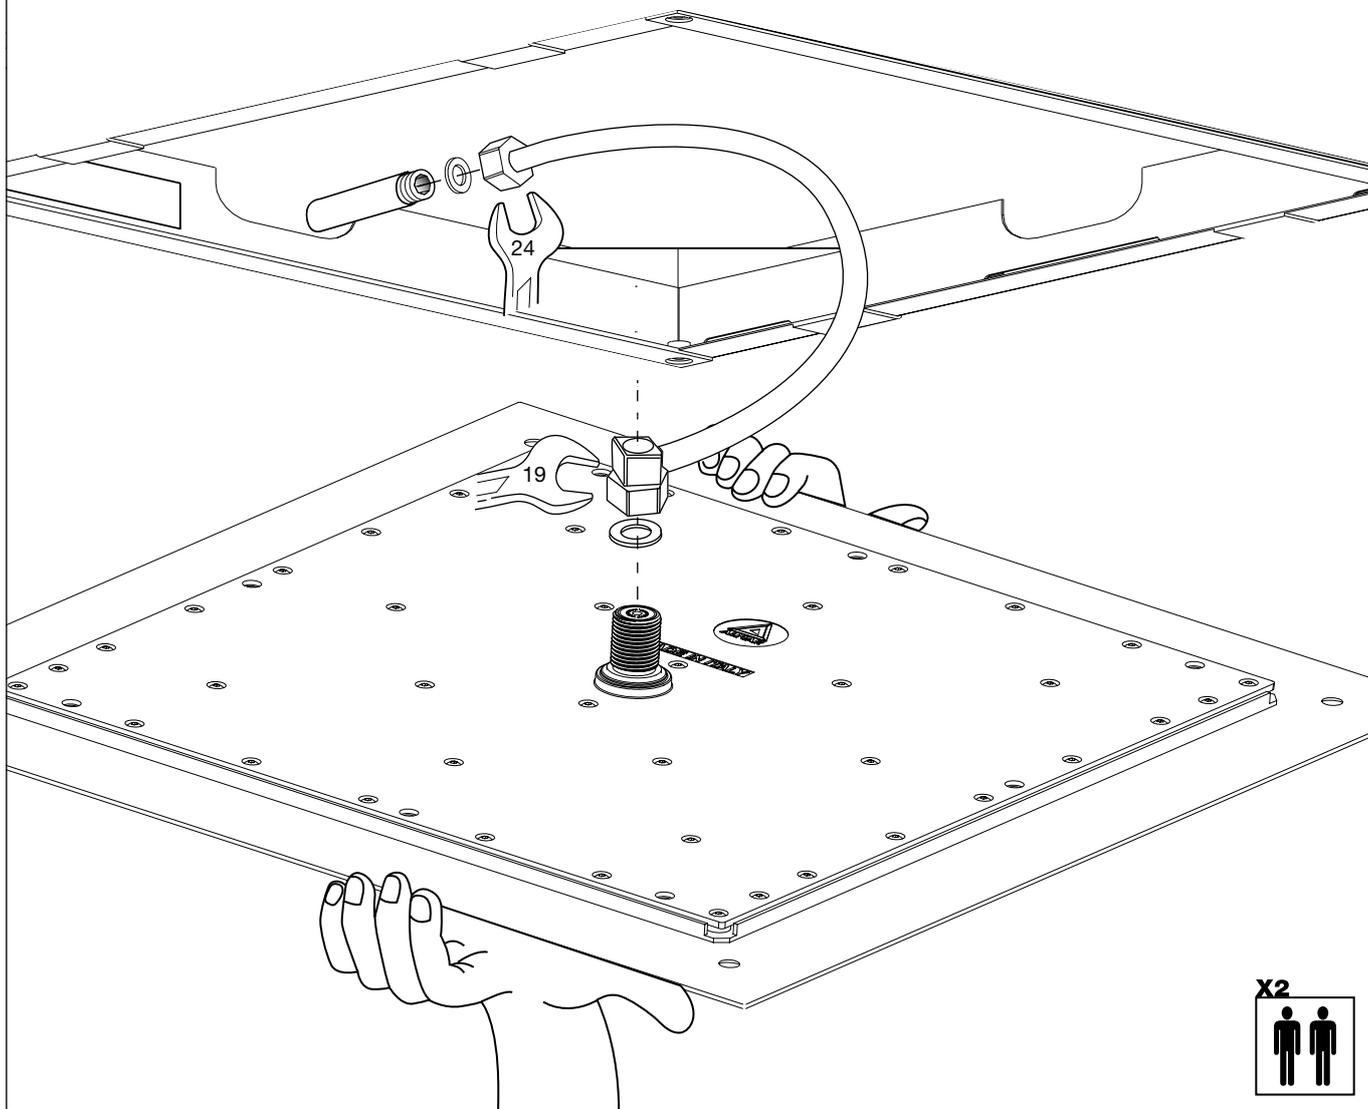


7

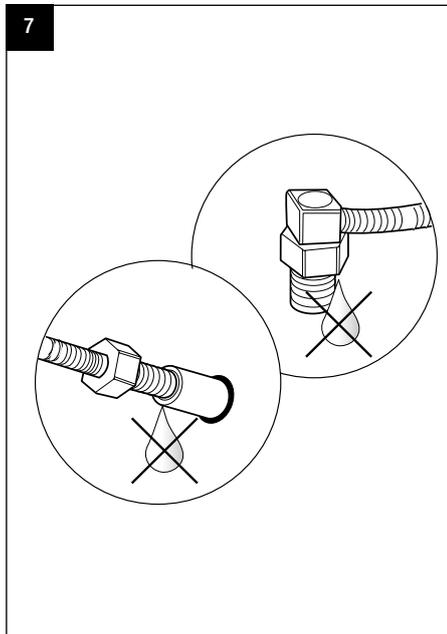

8

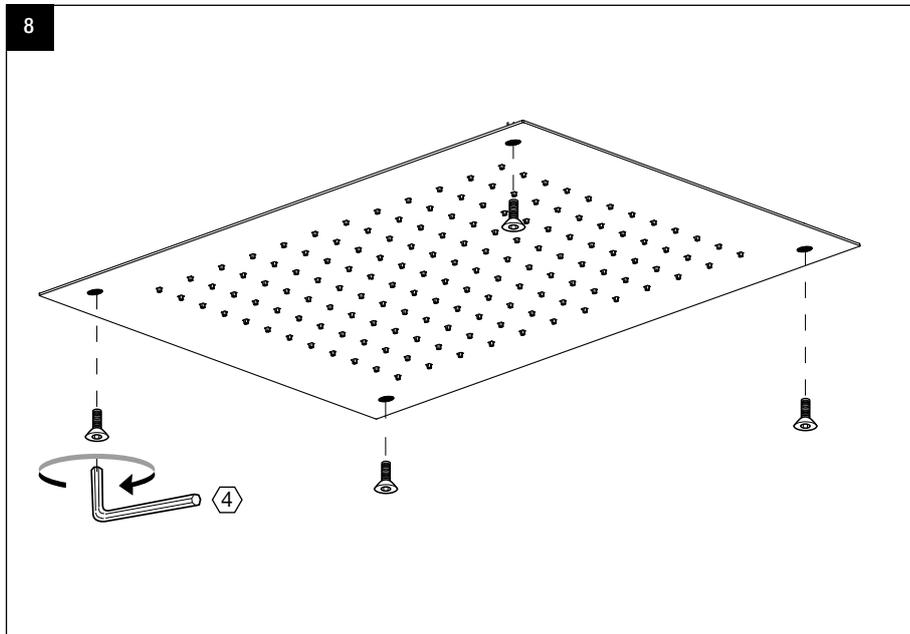

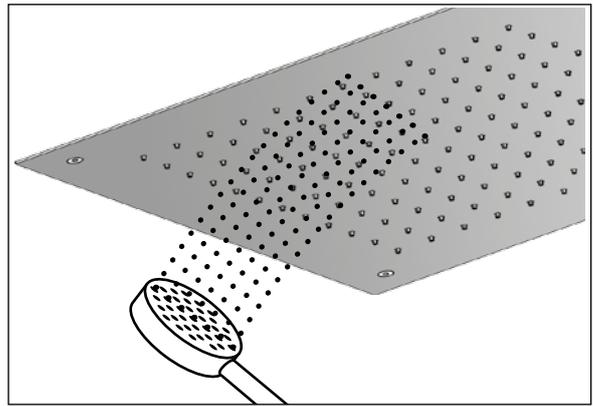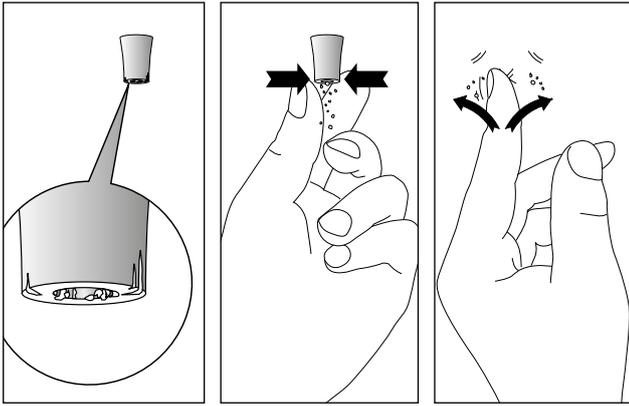

Cleaning Instructions

Rinse away any traces of soap and gently dry with a clean, soft cloth after each use. Rinse completely with water and dry any overspray. This will maintain the finish and avoid water spotting.

To remove mineral deposits, use a 50/50 solution of white vinegar and water. Do not allow the solution to soak on the product.

Simichrome Polish® contains a protective film to enhance maintenance and is helpful in preventing water spot buildup. Follow instructions to ensure optimum results.

Never use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners, cleansers or disinfectants will alter the surface finish and void the warranty.

Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain and glass cleaners to remain on the surface. Prolonged contact will alter surface finishes and void the warranty.

We DO NOT recommend using any household cleaners as many can cause damage to the finish.

Please see the website for care instructions for specific finishes.

Warranty - This **Crosswater London** product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website.

For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757

www.crosswaterlondon.com

Toll free number: 844-XWATER-1 (844-992-8371) tel: 508-381-0433 fax: 508-381-6068

email: technical@crosswaterlondon.com

Issue date: 07262019