

# crosswater<sup>x</sup>

LONDON

Fenmore Single-hole Basin Faucet  
28-01

## Installation Instructions



### Tools You Will Need



Adjustable Wrench



Adjustable Pliers



Teflon Tape

For ease of installation you will need:


- To read the installation instructions completely before beginning.
- To read all warnings, care, and maintenance information.

Before beginning installation, check for any damage that may have occurred during transport.

**Note: Damage claims cannot be made during or after installation.**


**Installation Instructions**

**1**




Lower faucet into mounting hole.

**2**




Install the washer and gasket onto the threaded tube.

**3**




Use a screwdriver to tighten the lock nut.

**4**




Slide push drain trim and plug into drain hole and secure from below.

**5**




Install the drain tail piece to the drain plug.

**6**




Push drain to test.

**6**



Apply Teflon (TPFE) tape on the shut off valves. Thread the tape in acounter-clockwise direction.


**7**




Attach water supply lines.

Hot Cold

**8**



Turn on angle stops and check all connections for leaks.

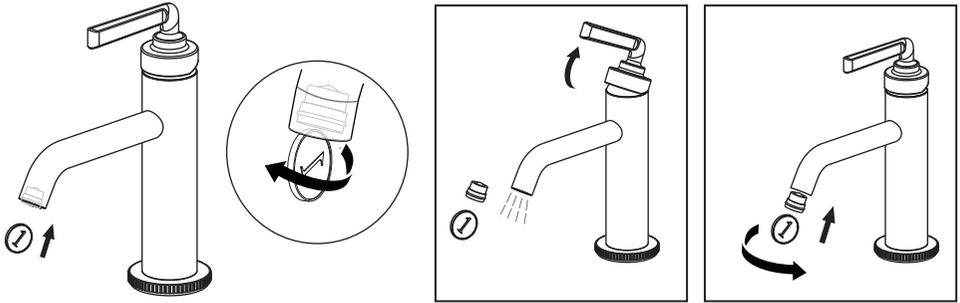

Remove aerator with coin and flush out debris.

## Cleaning Instructions

Rinse away any traces of soap and gently dry with a clean, soft cloth after each use. Rinse completely with water and dry any overspray. This will maintain the finish and avoid water spotting.

To remove mineral deposits, use a 50/50 solution of white vinegar and water. Do not allow the solution to soak on the product.

Simichrome Polish® contains a protective film to enhance maintenance and is helpful in preventing water spot buildup. Follow instructions to ensure optimum results.

Never use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners, cleansers or disinfectants will alter the surface finish and void the warranty.

Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain and glass cleaners to remain on the surface. Prolonged contact will alter surface finishes and void the warranty.

**We DO NOT recommend using any household cleaners as many can cause damage to the finish.**

Please see the website for care instructions for specific finishes.


## Trouble-Shooting

If you have followed the instructions and your faucet still does not work properly take these corrective steps.

Problem	Cause	Action
Leaks under spout body	Loose water supply lines	Tighten all connections
Aerator leaks or has an inconsistent water flow pattern	Aerator is dirty or mis-threaded	Remove aerator with key and flush out debris. Reinstall aerator and save aerator key for homeowner
Only hot or only cold water is coming out of the spout	The hot or cold stop valve is not opened	Open the hot or cold stop valves
Handle will not move	Cartridge is dirty or mis-fitted	Remove, rinse and reinstall cartridge

**Replacement Parts**

NO.	Description	Part NO.
1	Handle Assembly	5Y0342000
2	Dome	5L0084700
3	Nut	5L0189100AL0
4	Cartridge Assembly	5D0M0023PL
5	Aerator	5E0005200PL0
6	Push Drain Mounting Hardware	9Q0938NT
7	Push Drain Assembly	5Y0M0196
8	Spout Ring	5L0188400
9	Washer	5R9002400PL0
10	Washer	5R4P0155PL
11	Mounting Hardware	5Y0043400NT0
12	Supply Hose(Hot)	5G0M0019CC7
13	Supply Hose(Cold)	5G0M0022CC7

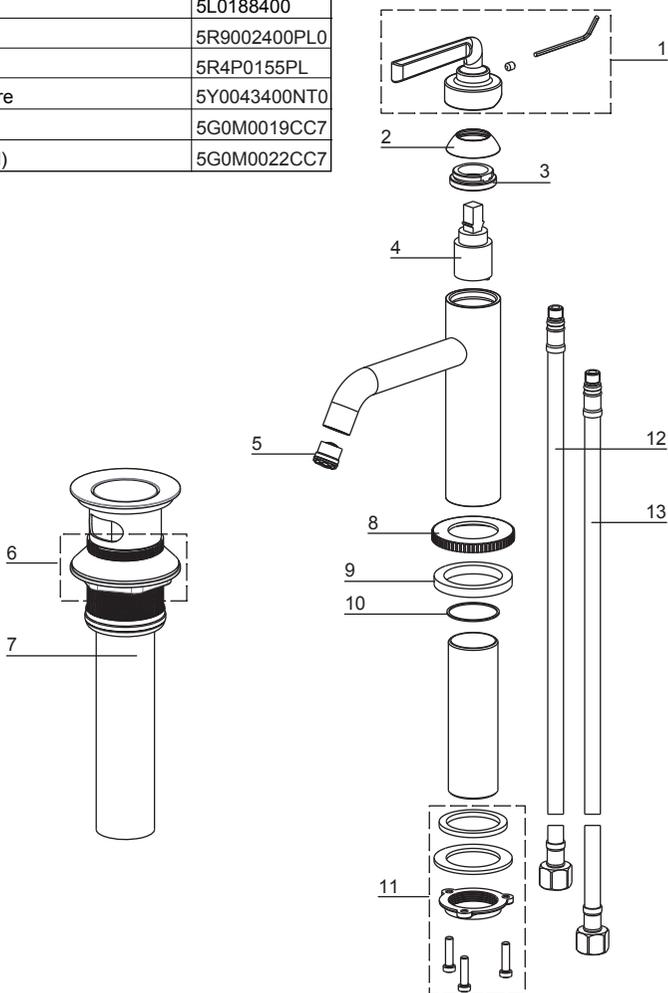


### Applicable Standards/Codes

IAPMO certified to meet or exceed the following:

- ASME A112.18.1/CSA B125.1
- Uniform Plumbing Code
- National Plumbing Code of Canada
- NSF/ANSI 61
- Section 116875 of the California Health & Safety Code
- EPA WaterSense
- ADA Compliant



### Installation Dimensions

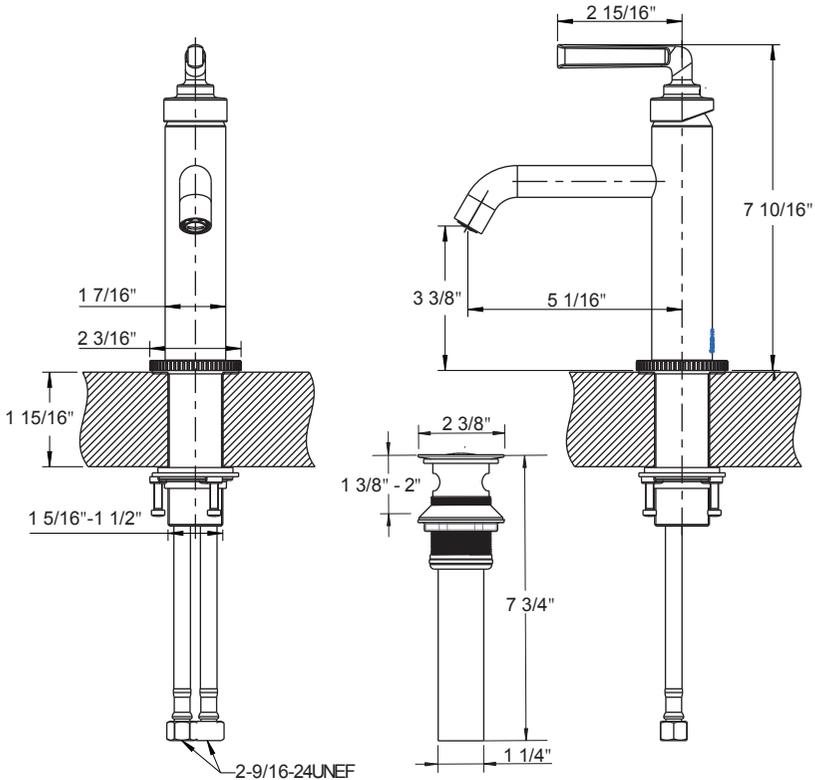

**Warranty** - This **Crosswater London** product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website.

For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757

[www.crosswaterlondon.com](http://www.crosswaterlondon.com)

Toll free number: 844-XWATER-1 (844-992-8371) tel: 508-381-6062 fax: 508-381-6068

email: [technical@crosswaterlondon.com](mailto:technical@crosswaterlondon.com)