

crosswater^x

LONDON

Fenmore
Volume Control Trim
28-17-T

Installation Instructions




Tools You Will Need



Adjustable Wrench



Adjustable Pliers




Hacksaw


For easy installation of your faucet you will need:

- To read all the installation completely before beginning.
- To read all warnings, care, and maintenance information.
- To complete the deck and valve rough-in prior to installing this trim kit.




Installation Instructions

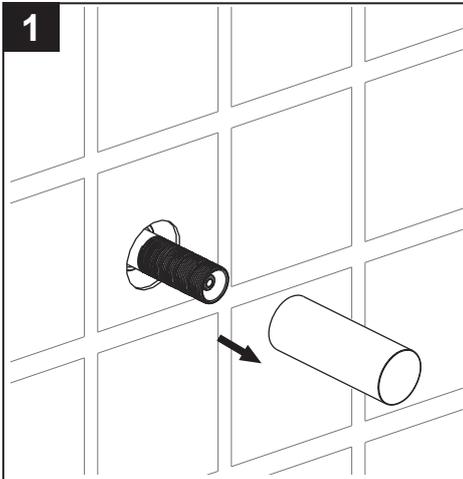






1
Turn the water off. Remove the mud guard.

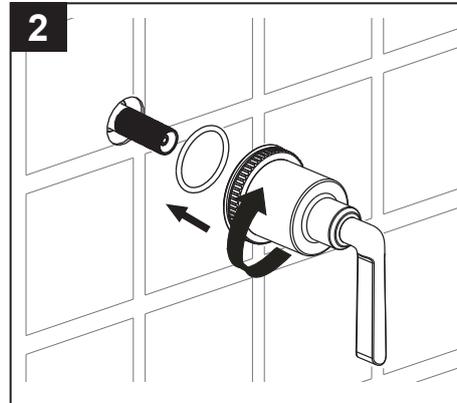


2
Place the "O" ring over the stem and nipple assembly. Align the handle and place the handle and escutcheon assembly into the valve. Secure the assembly by turning the escutcheon clockwise.
a. If the escutcheon will not firmly secure to the wall please go to step #3.
b. If the handle will not engage the stem, please to step #4.

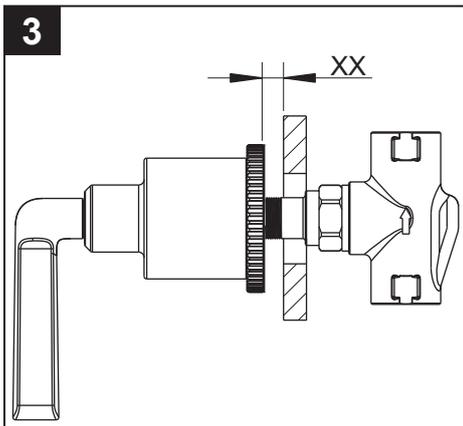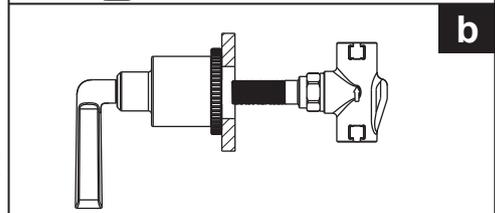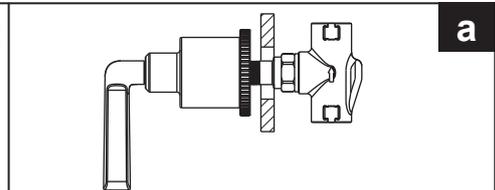






3
Measure and note the distance 'XX' between the finished wall and the bottom of the escutcheon.




a. Remove the handle and escutcheon assembly.
b. Remove the stem and threaded nipple.
c. Cut the stem and threaded nipple the amount noted in step #3.
d. Reinstall the stem and threaded nipple.
e. Reinstall the handle and escutcheon as in step #2. Then turn on the water and go to step #5.

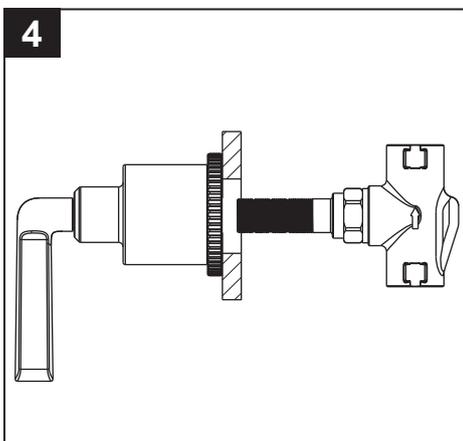

4
If the handle will not engage the stem, then:



a. Remove the handle and escutcheon assembly.
b. Install the extended stem and nipple supplied with the trim.
c. Reinstall the handle and escutcheon as in step #2.
d. If the escutcheon will not firmly secure to the wall please go to step #3.

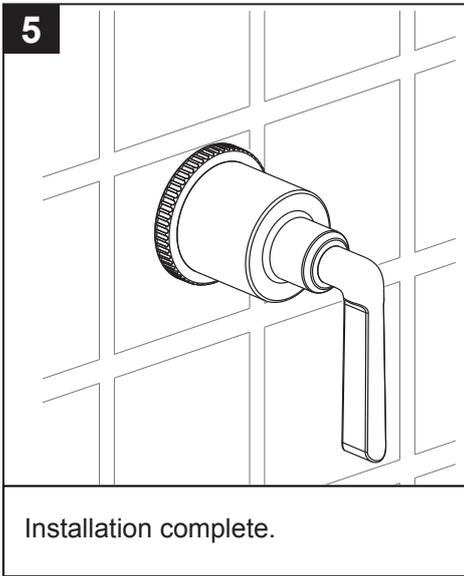


Cleaning Instructions

- Only use a soft, dampened sponge or cloth to clean and polish the fixture.
- Wipe fixtures and the immediate areas clean and rinse completely with water immediately after installation and after applying any cleaner.
- If you are using a cleaning compound on or close to the product, please test the compound on a hidden area of the trim to ensure it will not damage the finish.
- Do not allow cleaners to soak anywhere on the product.

Replacement Parts

NO.	Description	Part No.
1	Threaded Nipple	5T1C0319NT
2	Stem	5L0164400PL0
3	Stem	5L0164400PL0
4	Handle Assembly	5Y0342400

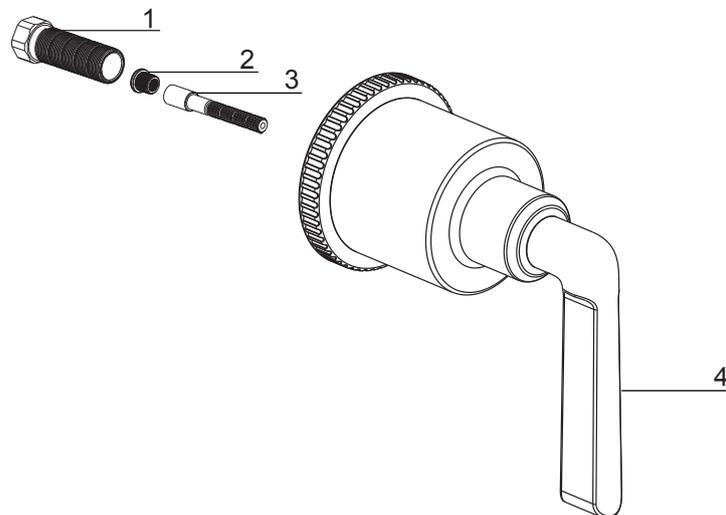


Applicable Standards/Codes

IAPMO certified to meet or exceed the following:

- ASME A112.18.1/CSA B125.1
- Uniform Plumbing Code
- National Plumbing Code of Canada
- ADA Compliant



Installation Dimensions

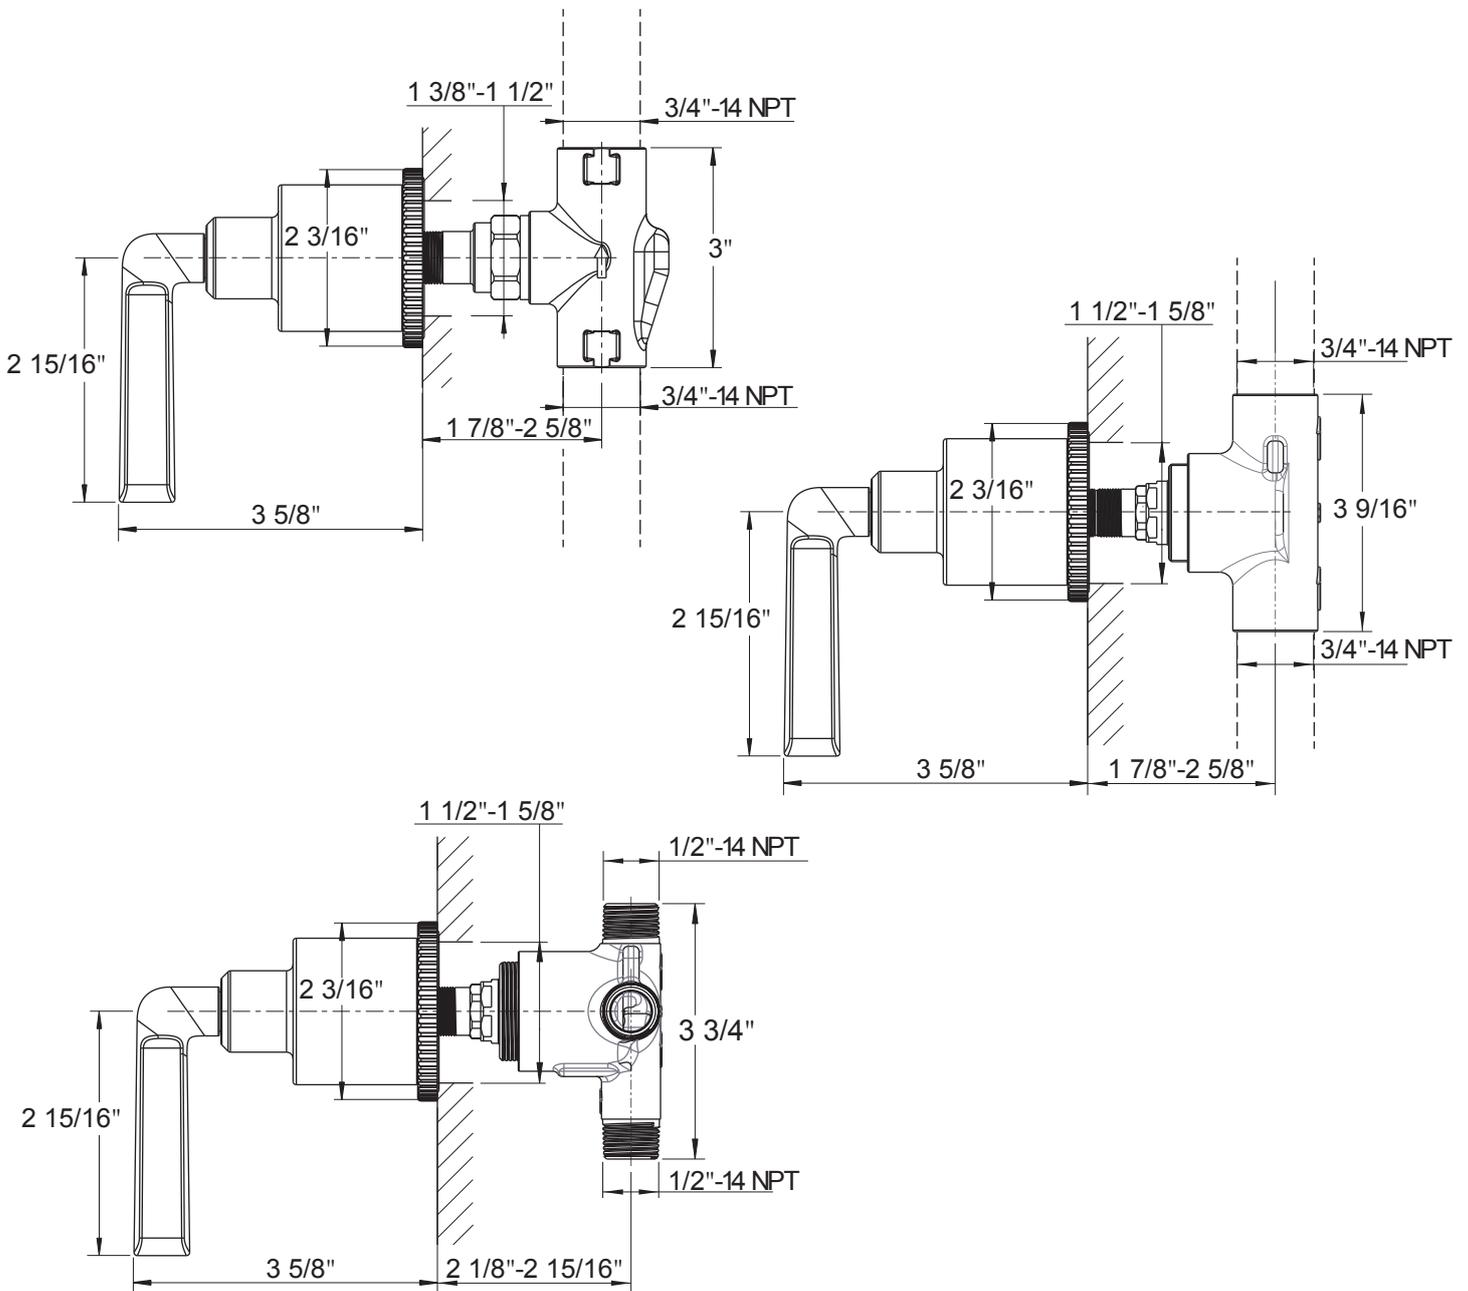

Warranty - This **Crosswater London** product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website.

For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757

www.crosswaterlondon.com

Toll free number: 844-XWATER-1 (844-992-8371) tel: 508-381-6062 fax: 508-381-6068

email: technical@crosswaterlondon.com