

1500 THERMOSTATIC ROUGH

US-WLBP1500R

FEATURES

- Solid brass construction
- Single integrated volume control/diverter for 2 water outlets
- Features Vernet thermostatic cartridge
- The thermostatic valve senses and controls the actual water temperature and blends hot water with cold water to ensure constant, safe temperatures, preventing scalding.

SPECIFICATIONS



Barcode	5055833670062
Number of water outlets	2
Flow rate	11 GPM
Inlet connection size	3/4" NPT
Outlet connection size	3/4" NPT
Water pressure minimum	20 PSI
Water pressure maximum	Operating pressure of 60 PSI and static pressure of 144 PSI
Extension kit	EK101525
Installation type	Concealed
IAPMO	Yes
State of MA	Yes
Rough-in depth maximum	4"
Rough-in depth minimum	3"



✔ Limited lifetime. Commercial



1500/1501 Thermostatic Valve Rough  
US-WLBP1500R/US- WLBP1501R

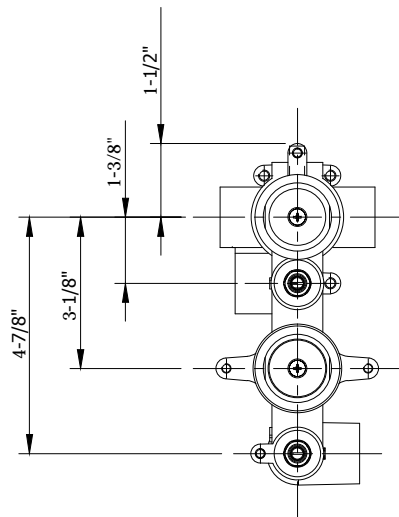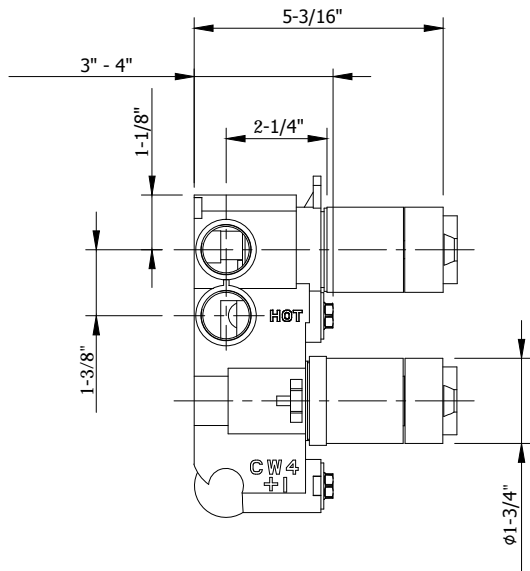

crosswater<sup>x</sup>  
LONDON