DIAL BELGRAVIA 2000 THERMOSTATIC VALVE TRIM WITH 2 INTEGRATED VOLUME CONTROLS

US-DIAL-BEL-3C

SPECIFICATIONS

Barcode	0
Finish	Polished Chrome
Number of water outlets	2
Handle style	Round and cross
Flow rate	13 GPM
Inlet connection size	3/4" NPT
Outlet connection size	3/4" NPT
Water pressure minimum	20 PSI
Water pressure maximum	Operating pressure of 60 PSI and static pressure of 144 PSI
Rough-in depth minimum	2-15/16"
Rough-in depth maximum	4-1/8"
Extension kit	US-EK2000BB
Installation type	Concealed
State of MA	Yes
IAPMO	Yes

✔ Limited lifetime. Commercial

AVAILABLE COLOR/FINISHES

Color	SKU	Description
	US-DIAL-BEL-3C	Polished Chrome

For further information contact Crosswater London, 393 Fortune Blvd, Milford, MA 01757 **Toll free number: 844-XWATER-1 (866-478-9052) tel: 508-381-0433 fax: 508-381-6068**
www.crosswaterlondon.com | technical@crosswaterlondon.com
Crosswater London reserves the right to make revisions without notice to product specifications. Please see website for detailed warrarnty information.

Dial Belgravia 2000 Thermostatic Valve Trim
US-DIAL-BEL-3C

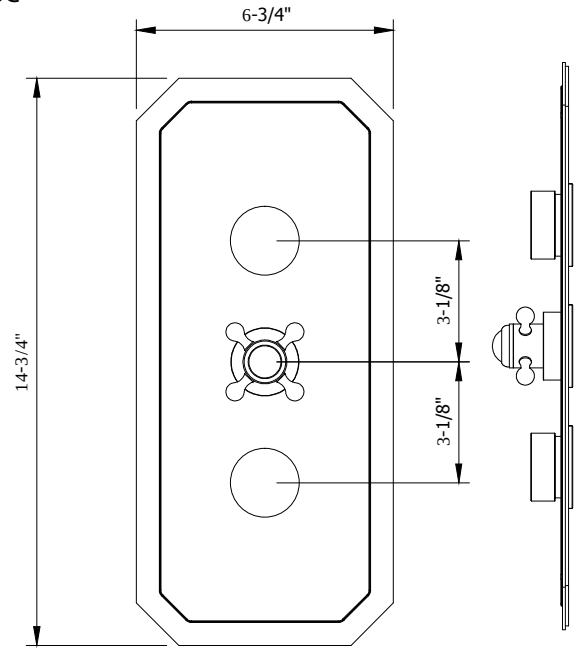

crosswater
LONDON