


MPRO 2000 THERMOSTATIC VALVE TRIM WITH TWO INTEGRATED VOLUME CONTROLS – PHASE OUT

Polished Nickel

US-PRO2000RN

SPECIFICATIONS

Barcode	0
Number of water outlets	2
Handle style	Lever
Flow rate	13 GPM
Inlet connection size	3/4" NPT
Outlet connection size	3/4" NPT
Water pressure minimum	20 PSI
Water pressure maximum	Operating pressure of 60 PSI and static pressure of 144 PSI
Installation type	Concealed
IAPMO	Yes
State of MA	Yes

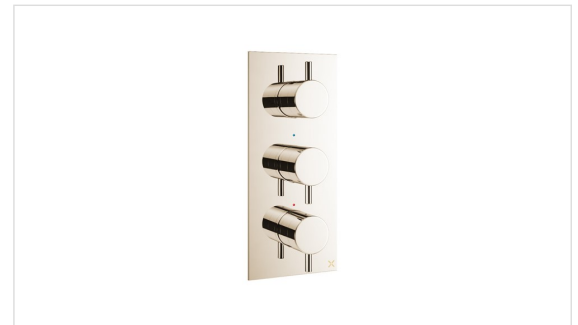

✓ Limited lifetime. Commercial



AVAILABLE COLOR/FINISHES

Color	SKU	Description
	US-PRO2000RN	Polished Nickel

MPRO 2000/3000 Thermostatic Valve Trim
US-PRO2000
US-PRO3000

