


**MPRO 2500 THERMOSTATIC VALVE TRIM WITH INTEGRATED VOLUME CONTROL/THREE-WAY DIVERTER - PHASE OUT**

Polished Nickel

US-PRO2500RN


**SPECIFICATIONS**

Barcode	0
Number of water outlets	3
Handle style	Lever
Flow rate	12 GPM
Inlet connection size	3/4" NPT
Outlet connection size	3/4" NPT
Water pressure minimum	20 PSI
Water pressure maximum	Operating pressure of 60 PSI and static pressure of 144 PSI
Installation type	Concealed

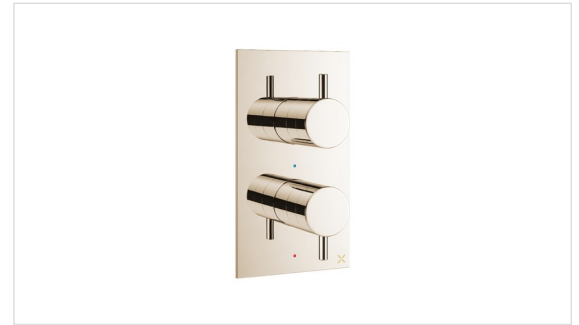

✔ Limited lifetime. Commercial

**AVAILABLE COLOR/FINISHES**

Color	SKU	Description
	US-PRO2500RN	Polished Nickel

MPRO 1000/1500/2500 Thermostatic Valve Trim

US-PRO1000

US-PRO1500

US-PRO2500

